

Induction Motor 90W(□90mm)

90W Induction Motor 90W(□90mm)

Induction Motor 90W(□90mm)

Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque		Rated Load			Capacitor μF / VAC	
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm N.m		
9IDG*~90F□(-T): Gear Type Shaft 9IDD*~90F(-T): D-Cut Type Shaft 9IDK*~90F(-T): Key Type Shaft													
9IDGA-90F□	9IDGA-90F□-T	90	1∅110	60	4	Cont.	5.00	0.500	1600	1.90	6.20	0.620	20.0 / 250
9IDGD-90F□	9IDGD-90F□-T	90	1∅220	60	4	Cont.	5.20	0.520	1600	0.90	6.20	0.620	5.0 / 450
9IDGE-90F□	9IDGE-90F□-T	90	1∅220	50	4	Cont.	5.00	0.500	1300	0.70	7.40	0.740	5.0 / 450
			1∅240				6.00	0.600		0.76	8.60	0.860	
9IDGG-90F□	9IDGG-90F□-T	90	3∅220	50	4	Cont.	20.00	2.000	1300	0.66	7.80	0.780	-
				60			16.60	1.660	1600	0.55	5.80	0.580	
9IDGK-90F□	9IDGK-90F□-T	90	3∅380	50	4	Cont.	21.80	2.180	1300	0.40	7.80	0.780	-
				60			17.20	1.720	1600	0.33	5.80	0.580	
			3∅400	50	4	Cont.	24.00	2.400	1300	0.43	8.60	0.860	
				60			19.20	1.920	1600	0.36	6.20	0.620	
			3∅415	50	4	Cont.	26.00	2.600	1350	0.43	7.40	0.740	
				60			20.20	2.020	1600	0.37	6.80	0.680	
3∅440	50	4	Cont.	29.00	2.900	1350	0.48	8.00	0.800				
	60			23.80	2.380	1650	0.37	6.00	0.600				

- 1) Enter the phase & voltage code in the place * and enter the model type of attaching Gearbox in the box (□) within the motor model name.
 2) All models contain a built-in thermal protector. 3) Gear Type Shaft is for attaching Gearbox and D-Cut & Key Type Shafts are for using motor only.
 ※ It is not possible to use inverter for three phase 380~440V motor. When inverter is used, the insulation of winding coil becomes hot and may cause damage to the motor.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio r/min	Gear Ratio																								
			2	3	3.6	5	6	7.5	9	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	
9IDG□ -90FP	9PBK□BH 9PFK□BH	kgfcm	10.3	15.4	18.5	25.7	30.9	38.6	46.3	58.1	69.8	83.7	84.3	105.4	126.5	151.8	168.6	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
		N.m	1.01	1.51	1.82	2.52	3.03	3.78	4.54	5.70	6.84	8.20	8.26	10.33	12.40	14.87	16.53	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9IDG□ -90FH	9HBK□BH 9HFK□BH	kgfcm	-	15.4	18.5	-	30.9	-	46.3	58.1	69.8	83.7	84.3	105.4	126.5	151.8	-	210.8	253.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	
		N.m	-	1.51	1.82	-	3.03	-	4.54	5.70	6.84	8.20	8.26	10.33	12.40	14.87	-	20.66	24.79	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio r/min	Gear Ratio						Motor Model	Gearbox Model	Gear Ratio r/min	Gear Ratio												
			10	12	15	18	25	30				36	50	60	7.5	10	15	20	25	30	40	50	60	80
9IDG□ -90FW	9WD□BL/ □BR/□BRL	kgfcm	50.8	59.5	71.6	82.6	108.5	122.8	153.1	142.9	122.4	9IDG□ -90FWH	9WHD□ -030	kgfcm	39.1	50.2	70.7	89.3	102.3	119.0	146.3	173.5	163.3	132.7
		N.m	4.98	5.83	7.02	8.08	10.63	12.03	15.00	14.00	12.00			N.m	3.83	4.92	6.93	8.75	10.03	11.67	14.34	17.00	16.00	13.00

50Hz

Motor Model	Gearbox Model	Gear Ratio r/min	Gear Ratio																							
			2	3	3.6	5	6	7.5	9	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
9IDG□ -90FP	9PBK□BH 9PFK□BH	kgfcm	12.3	18.4	22.1	30.7	36.9	46.1	55.3	69.4	83.3	99.9	100.6	125.8	151.0	181.2	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
		N.m	1.20	1.81	2.17	3.01	3.61	4.51	5.42	6.80	8.16	9.79	9.86	12.33	14.79	17.75	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9IDG□ -90FH	9HBK□BH 9HFK□BH	kgfcm	-	18.4	22.1	-	36.9	-	55.3	69.4	83.3	99.9	100.6	125.8	151.0	181.2	-	251.6	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
		N.m	-	1.81	2.17	-	3.61	-	5.42	6.80	8.16	9.79	9.86	12.33	14.79	17.75	-	24.66	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio r/min	Gear Ratio						Motor Model	Gearbox Model	Gear Ratio r/min	Gear Ratio												
			10	12	15	18	25	30				36	50	60	7.5	10	15	20	25	30	40	50	60	80
9IDG□ -90FW	9WD□BL/ □BR/□BRL	kgfcm	60.7	71.0	85.5	98.6	129.5	146.5	153.1	142.9	122.4	9IDG□ -90FWH	9WHD□ -030	kgfcm	46.6	59.9	84.4	106.6	122.1	142.1	174.6	173.5	163.3	132.7
		N.m	5.95	6.96	8.38	9.66	12.69	14.36	15.00	14.00	12.00			N.m	4.57	5.87	8.27	10.44	11.97	13.92	17.11	17.00	16.00	13.00

- 1) Enter the phase & voltage code in the box (□) within the motor model name. 2) Enter the gear ratio in the box (□) within the Gearbox model name.
 3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.
 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.


B AC Motors

Induction Motor 90W(□90mm)

Dimensions

MOTOR ONLY


- MOTOR MODEL:
9IDD□-90F(-T) (GENERAL FAN)

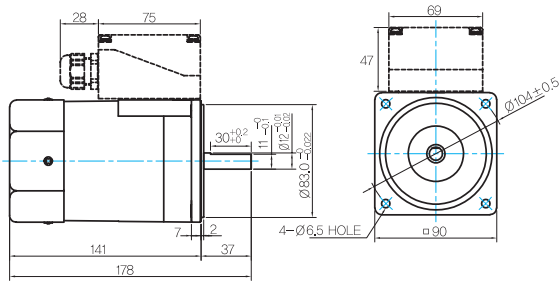

MOTOR OUTPUT SHAFT


MODEL	SPEC
D-CUT TYPE	37 30±0.2 18±0.05 ∅17±0.05
KEY TYPE	37 25±0.2 ∅17±0.05
9IDD□-90F	
9IDK□-90F	

KEY SPEC



INTER-DECIMAL GEARBOX


- MODEL:
9XD10□□

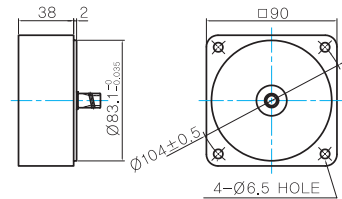

GEARED MOTOR


P TYPE GEARBOX

- MOTOR MODEL:
9IDG□-90FP (GENERAL FAN)

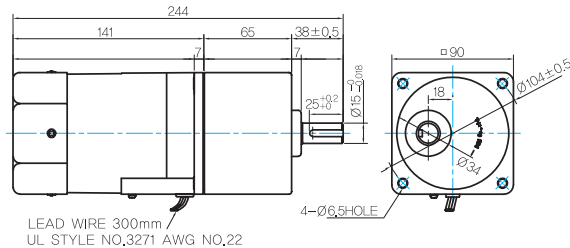

- GEARBOX MODEL:
9PBK□BH


- GEARBOX MODEL:
9PFK□BH

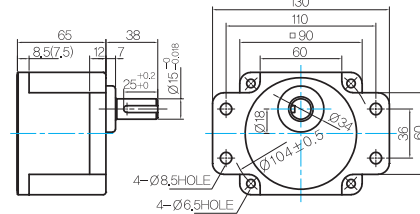

GEARBOX OUTPUT SHAFT


MODEL	SPEC
KEY TYPE	38 25±0.2 ∅15±0.038
9PBK□BH	
9PFK□BH	

KEY SPEC




H TYPE GEARBOX

- MOTOR MODEL:
9IDG□-90FH (GENERAL FAN)

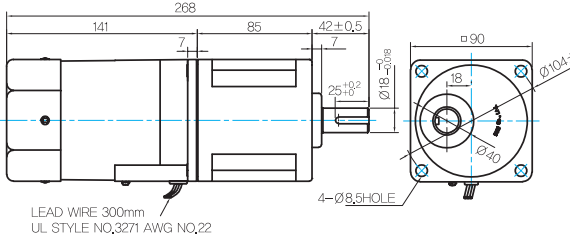

- GEARBOX MODEL:
9HBK□BH


- GEARBOX MODEL:
9HFK□BH

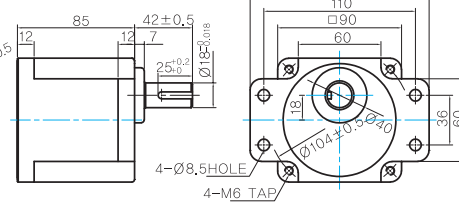

GEARBOX OUTPUT SHAFT


MODEL	SPEC
KEY TYPE	42 25±0.2 ∅15±0.038
9HBK□BH	
9HFK□BH	

KEY SPEC




W TYPE GEARBOX

- MOTOR MODEL:
9IDG□-90FW (GENERAL FAN)

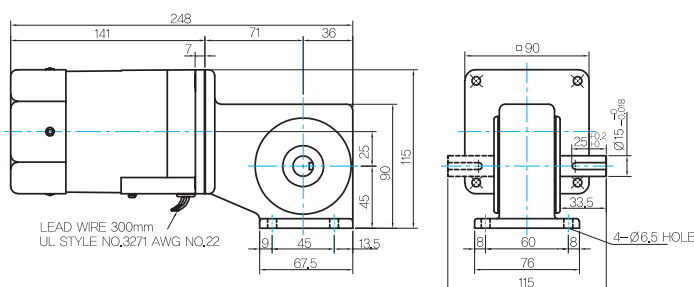


- GEARBOX MODEL:
9WD□BL/BR/BRL

KEY SPEC


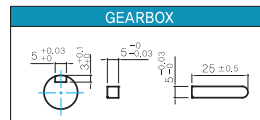


WH TYPE GEARBOX


MOTOR MODEL:
9IDG□-90FWH (GENERAL FAN)

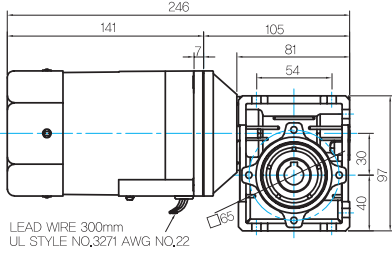

GEARBOX MODEL:
9WHD□-030

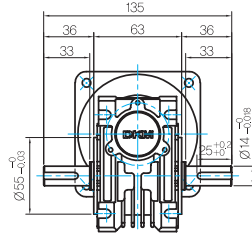

SHAFT


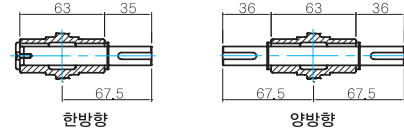


WEIGHT


PART	WEIGHT(kg)	
MOTOR	3.0	
GEAR BOX	9PB(F)K2BH ~ 9PB(F)K18BH	1.3
	9PB(F)K20BH ~ 9PB(F)K200BH	1.4
	9HB(F)K3BH ~ 9HB(F)K9BH	1.45
	9HB(F)K12.5BH ~ 9HB(F)K18BH	1.5
	9HB(F)K20BH ~ 9HB(F)K60BH	1.7
	9HB(F)K75BH ~ 9HB(F)K200BH	1.8
	9WD□BL/BR/BRL	1.0
	9WHD□-030	1.13
	9XD10□	0.5

* 출력 FLANGE와 SHAFT는 별매입니다.


FLANGE



KEY SPEC

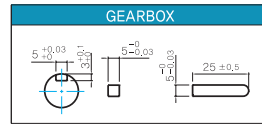


Motor Images

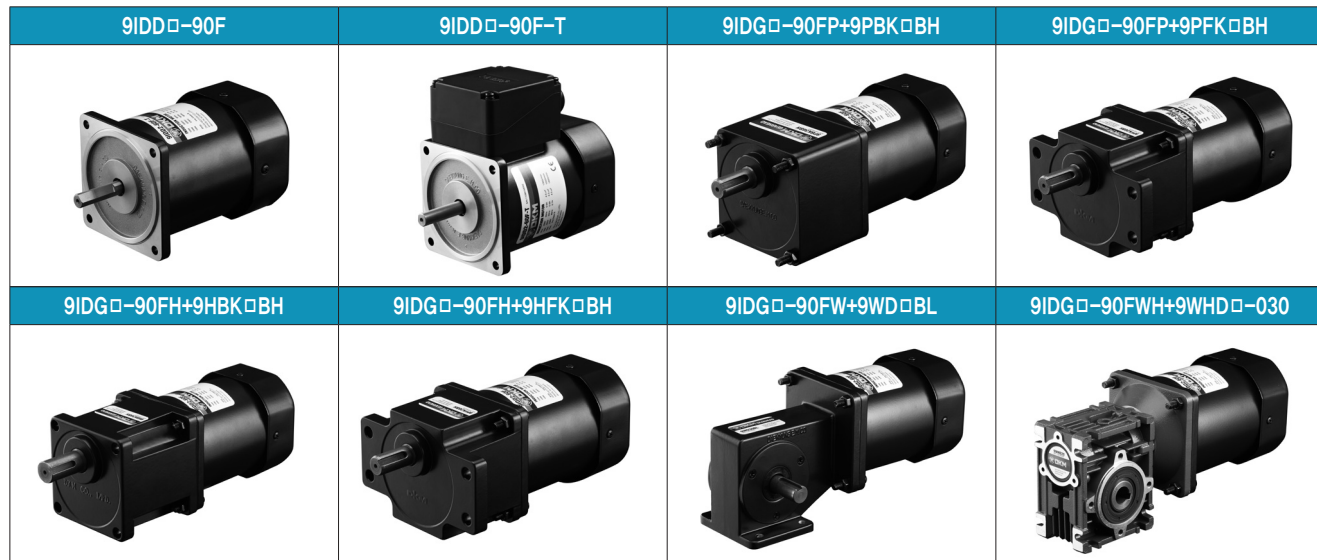

B AC Motors

Induction Motor 90W(□90mm)

Connection Diagrams

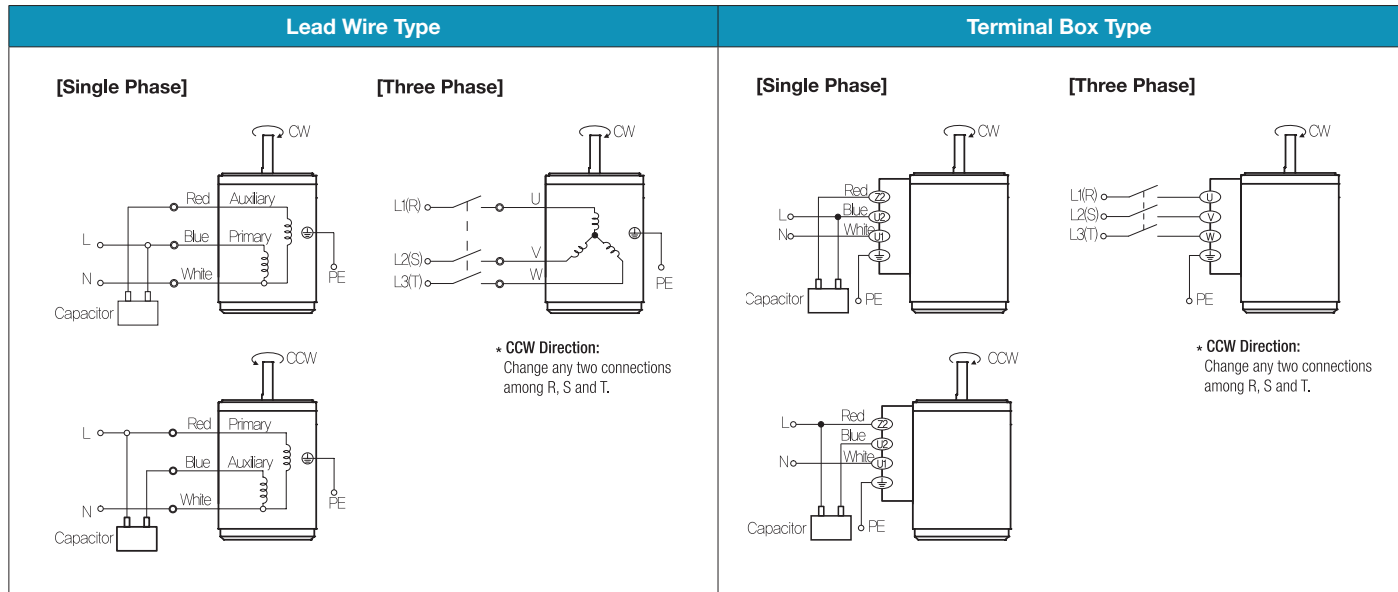

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.