

B AC Motors

Brake Motor 6W (□70mm)

6W Brake Motor 6W(□70mm)

Motor Specification

| Model 7BDG□-6G: Gear Type Shaft 7BDD□-6: D-Cut Type Shaft | Output W | Voltage V | Frequency Hz | Poles | Duty | Starting Torque | | Rated Load | | | Capacitor μF / VAC | |
|---|-------------|--------------|-----------------|-------|--------|-----------------|-------|----------------|--------------|---------------------|-----------------------|-----------|
| | | | | | | kgfcm | N.m | Speed r/min | Current A | Torque kgfcm N.m | | |
| 7BDGA-6G | 6 | 1∅110 | 60 | 4 | 30min. | 0.64 | 0.064 | 1600 | 0.29 | 0.50 | 0.050 | 3.0 / 250 |
| 7BDGD-6G | 6 | 1∅220 | 60 | 4 | 30min. | 0.85 | 0.085 | 1600 | 0.16 | 0.60 | 0.060 | 1.0 / 450 |
| 7BDGE-6G | 6 | 1∅220 | 50 | 4 | 30min. | 0.61 | 0.061 | 1250 | 0.13 | 0.68 | 0.068 | 0.8 / 450 |
| | | 0.75 | | | | 0.075 | 0.14 | | 0.76 | 0.076 | | |

- 1) Enter the phase & voltage code in the box (□) within the motor model name.
- 2) All models contain a built-in thermal protector.
- 3) Gear Type Shaft is for attaching Gearbox and D-Cut Type Shaft is for using motor only.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

| Motor Model | Gearbox Model | Gear Ratio | 3 | 3.6 | 6 | 7.5 | 9 | 12.5 | 15 | 18 | 25 | 30 | 36 | 50 | 60 | 75 | 90 | 100 | 120 | 150 | 180 |
|-------------|---------------|------------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | | r/min | 600 | 500 | 300 | 240 | 200 | 144 | 120 | 100 | 72 | 60 | 50 | 36 | 30 | 24 | 20 | 18 | 15 | 12 |
| 7BDG□-6G | 7GBK□BMH | kgfcm | 1.5 | 1.8 | 3.0 | 3.7 | 4.5 | 6.2 | 7.5 | 9.0 | 11.3 | 13.5 | 14.7 | 20.4 | 24.5 | 30.6 | 36.7 | 40.8 | 49.0 | 50.0 | 50.0 |
| | | N.m | 0.15 | 0.18 | 0.29 | 0.37 | 0.44 | 0.61 | 0.73 | 0.88 | 1.10 | 1.32 | 1.44 | 2.00 | 2.40 | 3.00 | 3.60 | 4.00 | 4.80 | 4.90 | 4.90 |

50Hz


| Motor Model | Gearbox Model | Gear Ratio | 3 | 3.6 | 6 | 7.5 | 9 | 12.5 | 15 | 18 | 25 | 30 | 36 | 50 | 60 | 75 | 90 | 100 | 120 | 150 | 180 |
|-------------|---------------|------------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | | r/min | 500 | 416 | 250 | 200 | 166 | 120 | 100 | 83 | 60 | 50 | 41 | 30 | 25 | 20 | 16 | 15 | 12.5 | 10 |
| 7BDG□-6G | 7GBK□BMH | kgfcm | 1.7 | 2.0 | 3.4 | 4.2 | 5.1 | 7.1 | 8.5 | 10.2 | 12.8 | 15.3 | 16.6 | 23.1 | 27.7 | 34.7 | 41.6 | 46.2 | 50.0 | 50.0 | 50.0 |
| | | N.m | 0.17 | 0.20 | 0.33 | 0.41 | 0.50 | 0.69 | 0.83 | 1.00 | 1.25 | 1.50 | 1.63 | 2.27 | 2.72 | 3.40 | 4.08 | 4.53 | 4.90 | 4.90 | 4.90 |

- 1) Enter the phase & voltage code in the box (□) within the motor model name.
- 2) Enter the gear ratio in the box (□) within the Gearbox model name.
- 3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.
- 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Dimensions

MOTOR ONLY

● MOTOR MODEL: 7BDD□-6 (NO FAN)

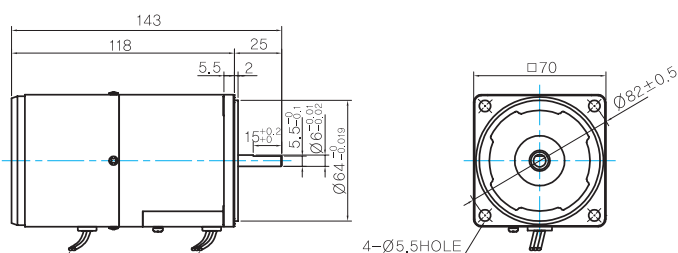

LEAD WIRE(Yellow) 300mm UL STYLE NO,3398 AWG NO,20
LEAD WIRE 300mm UL STYLE NO,3266 AWG NO,20

MOTOR OUTPUT SHAFT


| MODEL | SPEC |
|------------|------|
| D-CUT TYPE | |

GEARED MOTOR

G TYPE GEARBOX

- MOTOR MODEL:
7BDG□-6G (NO FAN)

- GEARBOX MODEL:
7GBK□BMH

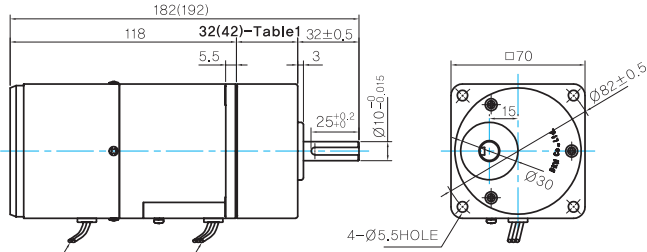

LEAD WIRE(Yellow) 300mm UL STYLE NO.3398 AWG NO.20
LEAD WIRE 300mm UL STYLE NO.3266 AWG NO.20

GEARBOX OUTPUT SHAFT

| MODEL | SPEC |
|----------|------|
| KEY TYPE | |

KEY SPEC

| GEARBOX | |
|---------|--|
| | |


WEIGHT

| PART | WEIGHT(Kg) | |
|----------|------------------------|------|
| MOTOR | 1.3 | |
| GEAR BOX | 7GBK3BMH - 7GBK18BMH | 0.36 |
| | 7GBK25BMH - 7GBK30BMH | 0.44 |
| | 7GBK36BMH - 7GBK180BMH | 0.5 |


32(42)-Table1

| SIZE(mm) | GEAR RATIO |
|----------|------------------------|
| 32 | 7GBK3BMH - 7GBK18BMH |
| 42 | 7GBK25BMH - 7GBK180BMH |

Motor Images

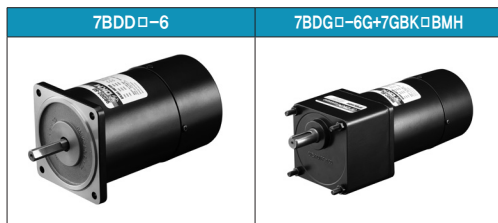

Connection Diagrams

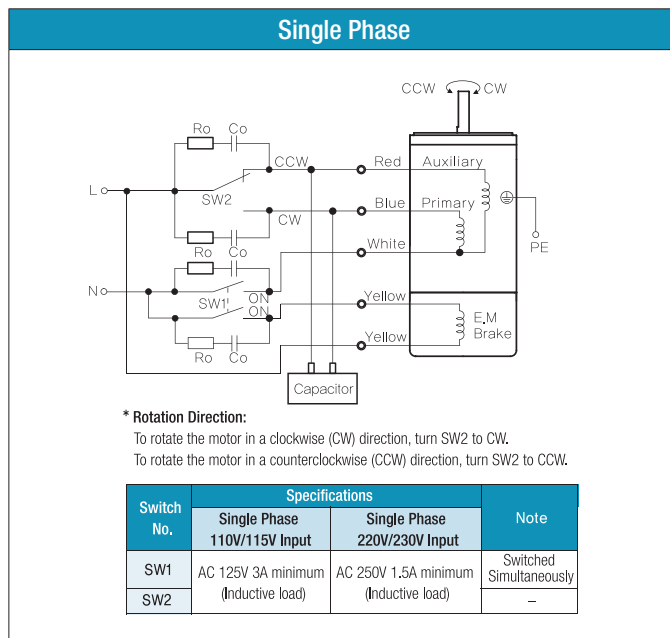

- The direction of motor rotation is as viewed from the shaft end of the motor.
- CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- SW1 operates both motor and electromagnetic brake action.
- The electromagnetic brake will be released and the motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.
- If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (yellow).
- Ro and Co indicate CR circuit for surge suppression. [Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400WV)]