



# Reversible Motor



## Index

<b>Outline of Reversible Motor</b>	B-75
<b>Reversible Motor 6W (□60mm)</b>	B-77
<b>Reversible Motor 6W (□70mm)</b>	B-79
<b>Reversible Motor 10W (□70mm)</b>	B-81
<b>Reversible Motor 15W (□70mm)</b>	B-83
<b>Reversible Motor 15W (□80mm)</b>	B-85
<b>Reversible Motor 25W (□80mm)</b>	B-88
<b>Reversible Motor 40W (□90mm)</b>	B-91
<b>Reversible Motor 60W (□90mm)</b>	B-94
<b>Reversible Motor 90W (□90mm)</b>	B-98
<b>Reversible Motor 120W (□90mm)</b>	B-102

# B AC Motors

## Outline of Reversible Motor

### ○ Suitable for Bi-directional Continuous Operation


- Reversible motors are designed for application where frequent switch of direction is required. It is capacitor run type and single phase induction motor. So its basic features including speed, torque and voltage are same with that of induction motors. For the function of frequent bi-directional operation within short time, the temporary brake is employed.

### ○ The Rating Time: 30 Minutes

- Reversible motors are designed for bi-directional operation within short time so it can't avoid very high loss of input. So generally its temperature rising could be more severe than induction motor. As a result, the rated operating time could be limited to 30 minutes. But please be informed that depending on operating condition, they can be operated for more 30 minutes if it is operated intermittently.


### ○ Brake Mechanism of the Reversible Motor

- A reversible motor employed a simple and built-in brake mechanism for the following purposes:
  - (1) To improve the frequent and instant reversing function by applying a friction load
  - (2) To reduce overrun
- The coil spring applies constant pressure so that the ceramic (brake block) slides toward the brake plate. This mechanism provides some degree of holding brake force, but there is limit in the force due to the mechanism's structure. The brake force is approximately 10% of the motor's output.

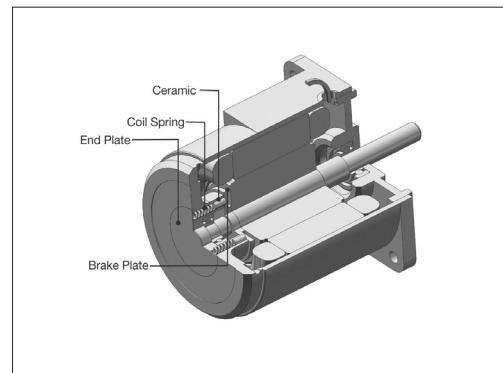

### ○ Speed-Torque Characteristics

- The reversible motor is a single phase induction motor of capacitor run type which has the same characteristics as an induction motor. The reversible motor has a higher starting torque than an induction motor in order to improve the instant reversing characteristics.

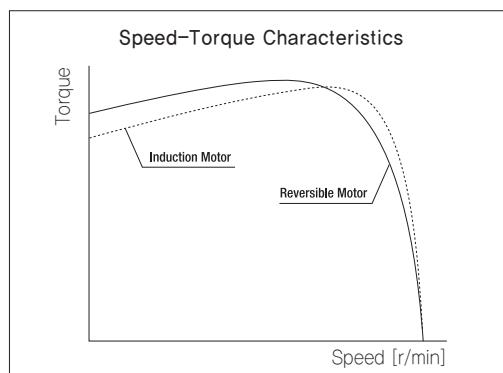


### ○ Operation Time and Temperature Rise

- The rating time of reversible motor is 30 minutes. But when the motor is operated intermittently for a short period of time, the operation time may vary depending on the operating conditions. The intermittent operation for a short period of time will cause a considerable flow of electric current in starting or reversing causing greater heat generation. But the motor's temperature rise can be controlled by keeping the motor at rest without using for a longer time by enhancing its natural cooling capability. Generally if the temperature of motor case remains below 90°C constantly, the continuous operation is possible under unchanged condition considering insulation class of coil winding. But the life time of bearing grease will be much longer, the lower temperature.

### ○ Operating Cycle and Temperature Rise




	Run	Stop								(Figure 1) Operating Cycle
A			1 sec.	1 sec.	1 sec.					1 sec. run, 1 sec. stop
B										2 sec. run, 2 sec. stop
C										2 sec. run, 1 sec. stop
D										1 sec. CW run, 1 sec. CCW run, 1 sec. stop
E										2 sec. CW run, 1 sec. CCW run, 1 sec. stop
F										Continuous run

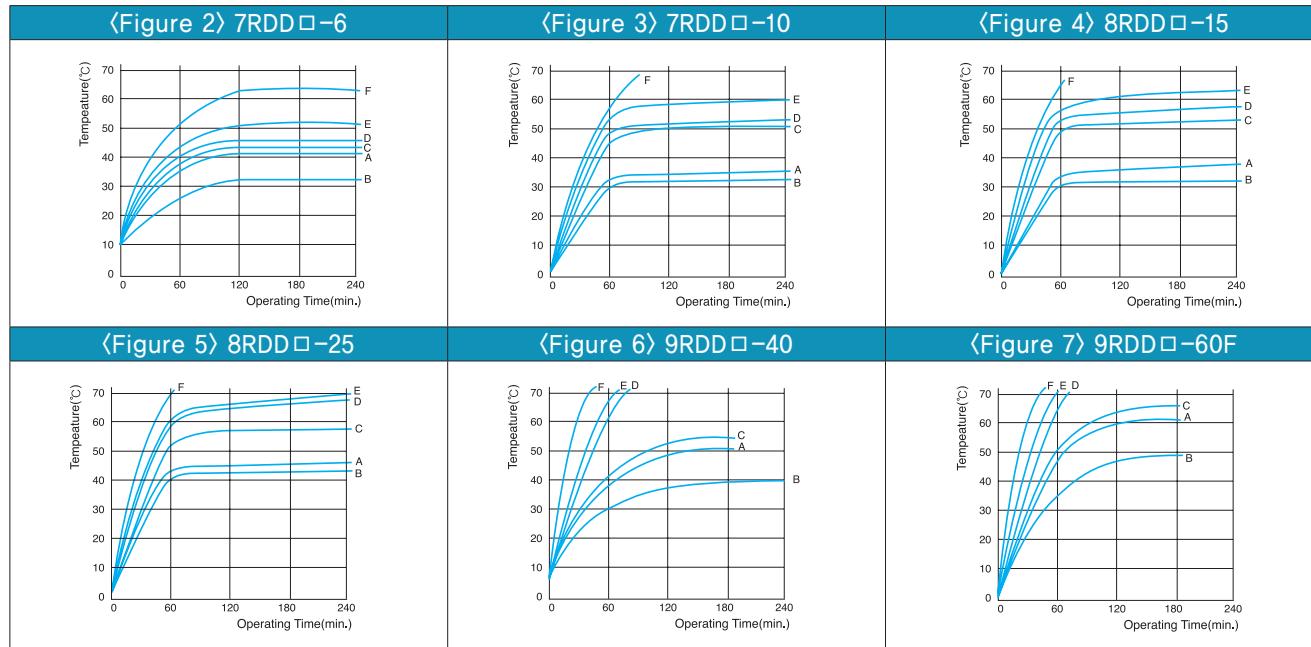

## General Specifications

Item	Specification
Insulation Resistance	100MΩ or more when DC500V MEGA is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5kV at 50Hz and 60Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 80°C or less measured by the resistance change method after rated motor operation with connecting a Gearbox or equivalent heat radiation plate.
Insulation Class	Class B [130°C]
Overheat Protection	Operating temperature (Built-in thermal protector type motor): Open 120°C±5°C, Close 90°C±5°C
Ambient Temperature	-10°C~+40°C (Three phase 220VAC: -10°C~+50°C)
Ambient Humidity	85% maximum

## Connection Diagrams

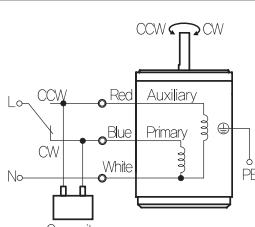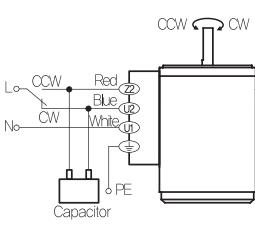Lead Wire Type	Terminal Box Type						
							
 <table border="1" style="margin-left: 20px;"> <tr> <th style="background-color: #0070C0; color: white;">Code</th> <th style="background-color: #0070C0; color: white;">Contact Capacity</th> </tr> <tr> <td>SW</td> <td>AC125V 5A min., or AC250V 5A min. (Inductive load)</td> </tr> <tr> <td>Ro, Co</td> <td>Ro=5~200Ω, Co=0.1~0.2μF, 200W (400W)</td> </tr> </table>	Code	Contact Capacity	SW	AC125V 5A min., or AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω, Co=0.1~0.2μF, 200W (400W)	* Connect a CR circuit for surge suppression to protect the contact.
Code	Contact Capacity						
SW	AC125V 5A min., or AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω, Co=0.1~0.2μF, 200W (400W)						

# B AC Motors

## Reversible Motor 6W(□ 60mm)

**6W** Reversible  
Motor  
6W(□ 60mm)

### Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque		Rated Load			Capacitor μF / VAC	
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm N.m		
6RDGA-6G	6RDGA-6G-T	6	1Ø110	60	4	30min.	0.60	0.060	1550	0.25	0.38	0.038	3.0 / 250
6RDGD-6G	6RDGD-6G-T	6	1Ø220	60	4	30min.	0.62	0.062	1550	0.15	0.42	0.042	1.0 / 450
6RDGE-6G	6RDGE-6G-T	6	1Ø220	50	4	30min.	0.50	0.050	1200	0.10	0.47	0.047	0.7 / 450
			1Ø240				0.55	0.055		0.11	0.50	0.050	

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) This model is impedance protected type.

3) Gear Type Shaft is for attaching Gearbox and D-Cut Type Shaft is for using motor only.

### Max. Permissible Torque at Output Shaft of Gearbox

#### 60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10
6RDG□-6G	6GBD□MH	kgfcm N.m	1.0 0.10	1.3 0.12	1.7 0.17	2.1 0.20	2.6 0.26	3.1 0.31	3.5 0.34	4.4 0.43	5.2 0.51	6.3 0.61	6.3 0.62	7.9 0.77	9.5 0.93	11.3 1.11	12.6 1.23	14.3 1.40	17.1 1.68	21.4 2.10	25.7 2.52	28.6 2.80	30.0 2.94	30.0 2.94	30.0 2.94
6RDG□-6G	6GBD□MH	kgfcm N.m	30.0 2.94	30.0 2.94																					

Motor Model	Gearbox Model	Gear Ratio	200	250																				
		r/min	9	7.2																				
6RDG□-6G	6GBD□MH	kgfcm N.m	30.0 2.94	30.0 2.94																				

#### 50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	500	417	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15	12	10	8
6RDG□-6G	6GBD□MH	kgfcm N.m	1.2 0.12	1.5 0.15	2.1 0.20	2.5 0.24	3.1 0.31	3.7 0.37	4.2 0.41	5.2 0.51	6.2 0.61	7.5 0.73	7.5 0.74	9.4 0.92	11.3 1.10	13.5 1.32	15.0 1.47	17.0 1.67	20.4 2.00	25.5 2.50	30.0 2.94	30.0 2.94	30.0 2.94	30.0 2.94	
6RDG□-6G	6GBD□MH	kgfcm N.m	30.0 2.94	30.0 2.94																					

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.


### Motor Images



 Dimensions

MOTOR ONLY

- MOTOR MODEL: 6RDD□-6(-T) (NO FAN)

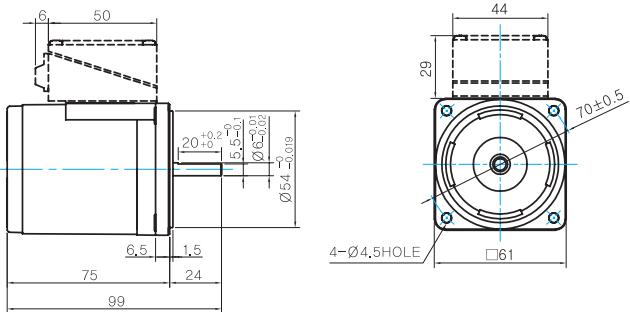


### ● MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	 <p>Technical drawing showing a D-cut type component. The top part is labeled "24" with a tolerance of "+0.2, -0.1". Below it is a dimension of "20" with a tolerance of "+0.2, -0.1". To the right is a dimension of "5.5" with a tolerance of "+0, -0.1". At the bottom is a dimension of "0.6" with a tolerance of "+0.05, -0.05". A blue horizontal line is drawn across the middle of the drawing.</p>


## GEARED MOTOR

#### G TYPE GEARBOX

- MOTOR MODEL: 6RDG□-6G (NO FAN)

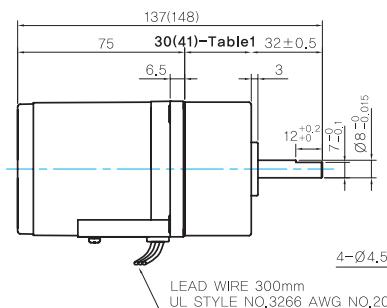

● GEARBOX MODEL: 6GBD□MH



### ● 30(41)-Table1

SIZE(mm)	GEAR RATIO
30	6GBD3MH - 6GBD18MH
41	6GBD20MH - 6GBD250MH




#### ● GEARBOX OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	<p>32 12<math>^{+0.2}_{-0.1}</math> 7.0 Ø8.0±0.05</p>

## WEIGHT

PART		WEIGHT(Kg)
MOTOR		0,7
GEAR BOX	6GBD3MH ~ 6GBD18MH	0,3
	6GBD20MH ~ 6GBD40MH	0,32
	6GBD50MH ~ 6GBD250MH	0,34

# Connection Diagrams

Lead Wire Type	Terminal Box Type						
							
	<table border="1" data-bbox="754 1892 1097 1990"> <thead> <tr> <th data-bbox="761 1894 859 1907">Code</th><th data-bbox="859 1894 1097 1907">Contact Capacity</th></tr> </thead> <tbody> <tr> <td data-bbox="761 1907 859 1941">SW</td><td data-bbox="859 1907 1097 1941">AC125V 5A min. or AC250V 5A min. (Inductive load)</td></tr> <tr> <td data-bbox="761 1941 859 1990">Ro, Co</td><td data-bbox="859 1941 1097 1990">Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)</td></tr> </tbody> </table> <p data-bbox="1097 1892 1366 1924">* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. or AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)
Code	Contact Capacity						
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)						

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

# B AC Motors

## Reversible Motor 6W(□ 70mm)

### 6W Reversible Motor 6W(□ 70mm)

#### Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque		Rated Load			Capacitor μF / VAC	
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm N.m		
7RDGA-6G	7RDGA-6G-T	6	1Ø110	60	4	30min.	0.64	0.064	1600	0.29	0.50	0.050	3.0 / 250
7RDGD-6G	7RDGD-6G-T	6	1Ø220	60	4	30min.	0.85	0.085	1600	0.16	0.60	0.060	1.0 / 450
7RDGE-6G	7RDGE-6G-T	6	1Ø220	50	4	30min.	0.61	0.061	1250	0.13	0.68	0.068	0.8 / 450
			1Ø240				0.75	0.075		0.14	0.76	0.076	

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching Gearbox and D-Cut Type Shaft is for using motor only.

#### Max. Permissible Torque at Output Shaft of Gearbox

##### 60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	600	500	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
7RDG-6G	7GBK-BMH	kgfcm N.m	1.5 0.15	1.8 0.18	3.0 0.29	3.7 0.37	4.5 0.44	6.2 0.61	7.5 0.73	9.0 0.88	11.3 1.10	13.5 1.32	14.7 1.44	20.4 2.00	24.5 2.40	30.6 3.00	36.7 3.60	40.8 4.00	49.0 4.80	50.0 4.90	50.0 4.90

##### 50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	500	416	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
7RDG-6G	7GBK-BMH	kgfcm N.m	1.7 0.17	2.0 0.20	3.4 0.33	4.2 0.41	5.1 0.50	7.1 0.69	8.5 0.83	10.2 1.00	12.8 1.25	15.3 1.50	16.6 1.63	23.1 2.27	27.7 2.72	34.7 3.40	41.6 4.08	46.2 4.53	50.0 4.90	50.0 4.90	50.0 4.90

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.



#### Motor Images



 Dimensions

MOTOR ONLY

- MOTOR MODEL: 7RDD□-6(-T) (NO FAN)

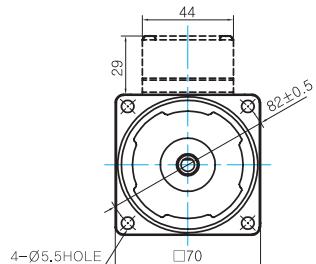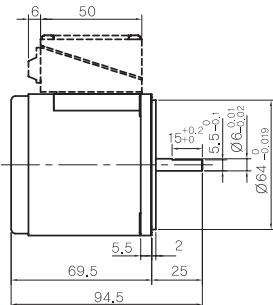


- MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	<p>25 15<sup>+0.2</sup>/<sub>0</sub> 15<sup>+0</sup>/<sub>0</sub> 5.5<sup>+0.2</sup>/<sub>0</sub> 06<sup>+0.2</sup>/<sub>0</sub> 11<sup>+0.2</sup>/<sub>0</sub></p>


GEARED MOTOR

#### G TYPE GEARBOX

- MOTOR MODEL: 7RDG□-6G (NO FAN)

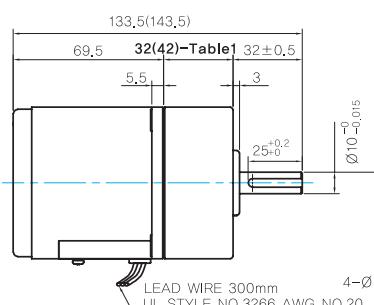

- GEARBOX MODEL:  
7GBK□BMH




#### ● GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	 <p>32 25+0.2 Ø10.0-0.015</p>

## WEIGHT

PART		WEIGHT(Kg)
MOTOR		0,84
GEAR BOX	7GBK3BMH ~ 7GBK18BMH	0,36
	7GBK25BMH ~ 7GBK30BMH	0,44
	7GBK36MH ~ 7GBK18OMH	0,5



## ● KEY SPEC

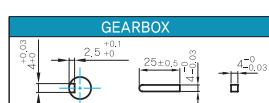

● 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH - 7GBK18BMH
42	7GBK25BMH - 7GBK180BMH

# Connection Diagrams

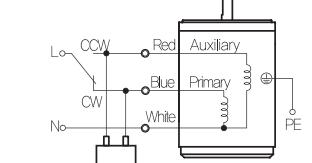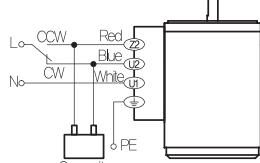Lead Wire Type	Terminal Box Type						
							
	<table border="1" data-bbox="763 1887 1091 1973"> <thead> <tr> <th data-bbox="770 1890 861 1899">Code</th><th data-bbox="861 1890 1091 1899">Contact Capacity</th></tr> </thead> <tbody> <tr> <td data-bbox="770 1899 861 1919">SW</td><td data-bbox="861 1899 1091 1919">AC125V 5A min. or AC250V 5A min. (Inductive load)</td></tr> <tr> <td data-bbox="770 1919 861 1943">Ro, Co</td><td data-bbox="861 1919 1091 1943">Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)</td></tr> </tbody> </table> <p data-bbox="1097 1887 1327 1916">* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. or AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)
Code	Contact Capacity						
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200WV (400WV)						

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

# B AC Motors

## Reversible Motor 10W(□70mm)

# 10W Reversible Motor 10W(□70mm)

### Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque		Rated Load			Capacitor μF / VAC	
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm N.m		
7RDGA-10G	7RDGA-10G-T	10	1Ø110	60	4	30min.	0.83	0.083	1550	0.31	0.70	0.070	3.5 / 250
7RDGD-10G	7RDGD-10G-T	10	1Ø220	60	4	30min.	1.00	0.100	1550	0.20	0.79	0.079	1.2 / 450
7RDGE-10G	7RDGE-10G-T	10	1Ø220	50	4	30min.	0.86	0.086	1250	0.16	0.82	0.082	1.0 / 450
			1Ø240				0.99	0.099		0.18	0.90	0.090	

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching Gearbox and D-Cut Type Shaft is for using motor only.

### Max. Permissible Torque at Output Shaft of Gearbox

#### 60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	600	500	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
7RDG□-10G	7GBK□BMH	kgfcm N.m	2.0 0.19	2.4 0.23	3.9 0.39	4.9 0.48	5.9 0.58	8.2 0.80	9.8 0.96	11.8 1.16	14.8 1.45	17.8 1.74	19.3 1.90	26.9 2.63	32.2 3.16	40.3 3.95	48.3 4.74	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90

#### 50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	500	416	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
7RDG□-10G	7GBK□BMH	kgfcm N.m	2.2 0.22	2.7 0.26	4.5 0.44	5.6 0.55	6.7 0.66	9.3 0.92	11.2 1.10	13.4 1.32	16.9 1.65	20.3 1.98	22.0 2.16	30.6 3.00	36.7 3.60	45.9 4.50	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90	

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.


### Motor Images



## Dimensions

### MOTOR ONLY

- MOTOR MODEL: 7RDD □-10(-T) (NO FAN)

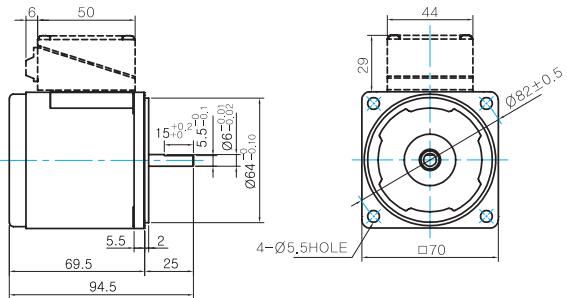


### MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	

## GEARED MOTOR

### G TYPE GEARBOX

- MOTOR MODEL: 7RDG □-10G (NO FAN)

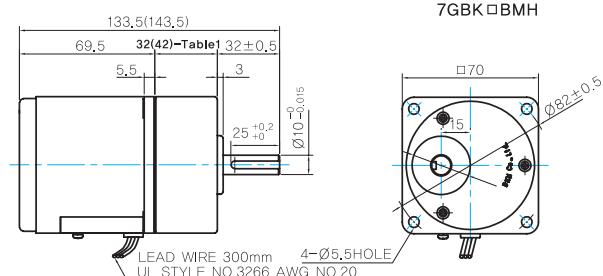

- GEARBOX MODEL: 7GBK □BMH


### GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	

### WEIGHT

PART		WEIGHT(Kg)
MOTOR		0.84
7GBK3BMH ~ 7GBK18BMH		0.36
7GBK25BMH ~ 7GBK30BMH		0.44
7GBK36MH ~ 7GBK180MH		0.5

### KEY SPEC

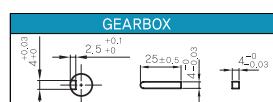

### 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH ~ 7GBK18BMH
42	7GBK25BMH ~ 7GBK180BMH

## Connection Diagrams

Lead Wire Type	Terminal Box Type						
	<table border="1"> <thead> <tr> <th>Code</th> <th>Contact Capacity</th> </tr> </thead> <tbody> <tr> <td>SW</td> <td>AC125V 5A min. or AC250V 5A min. (Inductive load)</td> </tr> <tr> <td>Ro, Co</td> <td>Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)</td> </tr> </tbody> </table> <p>* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. or AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)
Code	Contact Capacity						
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)						

- The direction of motor rotation is as viewed from the shaft end of the motor.
- CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- During operation it is available to change the rotating direction by turning the switch to CW or CCW.

# B AC Motors

## Reversible Motor 15W(□ 70mm)

# 15W Reversible Motor 15W(□ 70mm)

### Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque		Rated Load			Capacitor μF / VAC	
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm N.m		
7RDGA-15G	7RDGA-15G-T	15	1Ø110	60	4	30min.	1.30	0.130	1600	0.46	1.05	0.105	6.0 / 250
7RDGD-15G	7RDGD-15G-T	15	1Ø220	60	4	30min.	1.25	0.125	1600	0.23	1.10	0.110	1.5 / 450
7RDGE-15G	7RDGE-15G-T	15	1Ø220	50	4	30min.	1.10	0.110	1250	0.17	1.25	0.125	1.2 / 450
			1Ø240				1.30	0.130		0.18	1.45	0.145	

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching Gearbox and D-Cut Type Shaft is for using motor only.

### Max. Permissible Torque at Output Shaft of Gearbox

#### 60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	600	500	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
7RDG□-15G	7GBK□BMH	kgfcm N.m	2.7 0.27	3.3 0.32	5.5 0.54	6.8 0.67	8.2 0.81	11.4 1.12	13.7 1.34	16.4 1.61	20.6 2.02	24.8 2.43	26.9 2.64	37.4 3.67	44.9 4.40	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90

#### 50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	500	416	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
7RDG□-15G	7GBK□BMH	kgfcm N.m	3.1 0.31	3.7 0.37	6.2 0.61	7.8 0.76	9.3 0.92	13.0 1.27	15.6 1.53	18.7 1.83	23.4 2.30	28.1 2.76	30.6 3.00	42.5 4.17	50.0 4.90						

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.


### Motor Images



## Dimensions

### MOTOR ONLY

● MOTOR MODEL: 7RDD □-15(-T) (NO FAN)

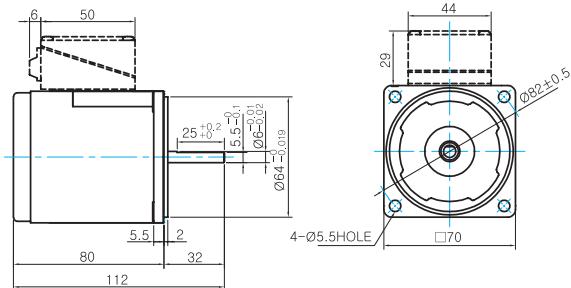


### MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	

## GEARED MOTOR

### G TYPE GEARBOX

● MOTOR MODEL: 7RDG □-15G (NO FAN)

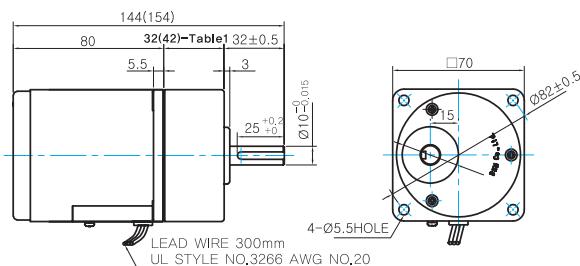

● GEARBOX MODEL: 7GBK □BMH


### GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	

### WEIGHT

	PART	WEIGHT(Kg)
	MOTOR	1.04
GEAR BOX	7GBK3BMH ~ 7GBK18BMH	0.36
	7GBK25BMH ~ 7GBK30BMH	0.44
	7GBK36MH ~ 7GBK180MH	0.5


### KEY SPEC

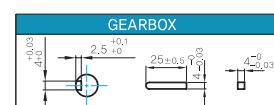

### 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH - 7GBK18BMH
42	7GBK25BMH - 7GBK180BMH

## Connection Diagrams

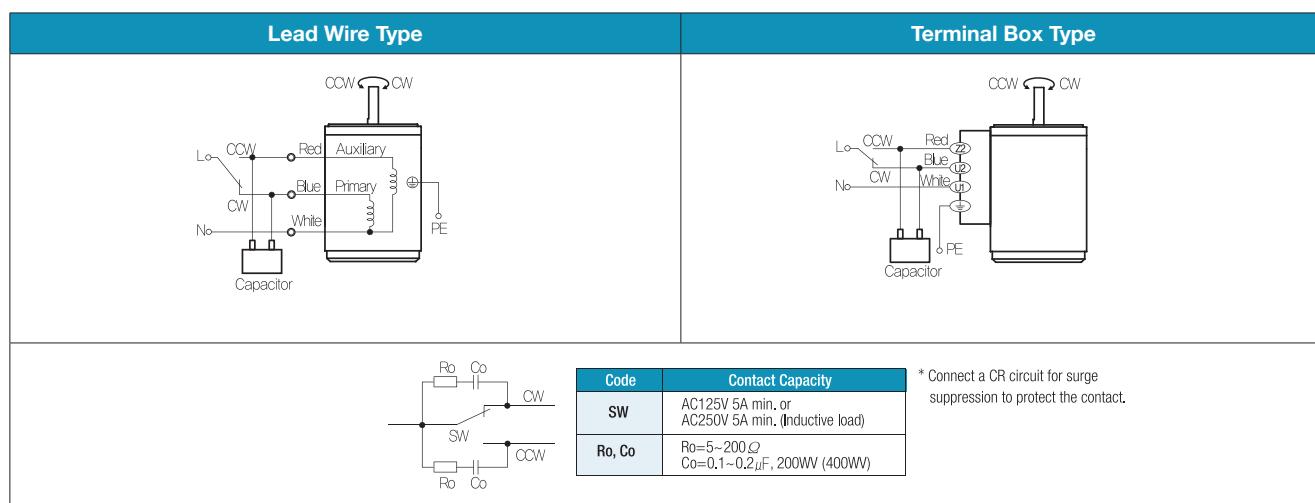

- The direction of motor rotation is as viewed from the shaft end of the motor.
- CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- During operation it is available to change the rotating direction by turning the switch to CW or CCW.

# B AC Motors

## Reversible Motor 15W(□ 80mm)

# 15W Reversible Motor 15W(□ 80mm)

### Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque		Rated Load			Capacitor μF / VAC	
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm N.m		
8RDGA-15□	8RDGA-15□-T	15	1Ø110	60	4	30min.	1.55	0.155	1600	0.44	1.20	0.120	6.0 / 250
8RDGD-15□	8RDGD-15□-T	15	1Ø220	60	4	30min.	1.50	0.150	1600	0.25	1.00	0.100	1.5 / 450
8RDGE-15□	8RDGE-15□-T	15	1Ø220	50	4	30min.	1.25	0.125	1200	0.16	1.30	0.130	1.5 / 450
			1Ø240				1.45	0.145		0.17	1.40	0.140	

1) Enter the phase & voltage code in the place \* and enter the model type of attaching Gearbox in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching Gearbox and D-Cut Type Shaft is for using motor only.

### Max. Permissible Torque at Output Shaft of Gearbox

#### 60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	600	500	360	300	240	200	144	120	100	72	60	50	45	36	30	24	20	18	15	12	10
8RDG□-15G	8GBK□BMH	kgfcm N.m	3.0 0.29	3.6 0.35	5.0 0.49	6.0 0.59	7.5 0.73	9.0 0.88	12.5 1.22	14.9 1.46	17.9 1.76	22.5 2.21	27.0 2.65	29.4 2.88	32.6 3.20	40.8 4.00	49.0 4.80	61.2 6.00	73.4 7.20	80.0 7.84	80.0 7.84	80.0 7.84	80.0 7.84
8RDG□-15G	8GBK□BMH	kgfcm N.m	80.0 7.84																				
Motor Model	Gearbox Model	Gear Ratio	200	250	300	360																	
Motor Model	Gearbox Model	Gear Ratio	9	7	6	5																	
			r/min	180	150	120	100	72	60	50	45	36	30	24	20	18	15	12	10	8	6	5	30
8RDG□-15G	8GBK□BMH	kgfcm N.m	80.0 7.84																				

#### 50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	40	50	60	75	90	100	120	150	180	
		r/min	500	417	300	250	200	167	120	100	83	60	50	42	38	30	25	20	17	15	13	10	8	
8RDG□-15G	8GBK□BMH	kgfcm N.m	3.5 0.34	4.2 0.41	5.8 0.57	7.0 0.68	8.7 0.85	10.5 1.02	14.5 1.42	17.4 1.71	20.9 2.05	26.3 2.57	31.5 3.09	34.3 3.36	38.1 3.73	47.6 4.66	57.1 5.60	71.4 7.00	80.0 7.84	80.0 7.84	80.0 7.84	80.0 7.84	80.0 7.84	
8RDG□-15G	8GBK□BMH	kgfcm N.m	80.0 7.84																					
Motor Model	Gearbox Model	Gear Ratio	200	250	300	360																		
Motor Model	Gearbox Model	Gear Ratio	7	6	5	5																		
			r/min	150	125	100	83	60	50	42	38	30	25	20	17	15	13	10	8	6	5	30		
8RDG□-15W	8WD□BL/□BR/□BRL	kgfcm N.m	11.5 1.13	13.4 1.32	16.2 1.58	18.6 1.83	24.5 2.40	27.7 2.72	32.3 3.16	42.0 4.12	46.2 4.53	11.5 1.13	13.4 1.32	16.2 1.58	18.6 1.83	24.5 2.40	27.7 2.72	32.3 3.16	42.0 4.12	46.2 4.53	11.5 1.13	13.4 1.32	16.2 1.58	18.6 1.83

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.



3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

## Dimensions

### MOTOR ONLY

- MOTOR MODEL: 8RDD□-15(-T) (NO FAN)

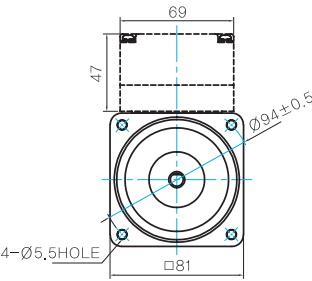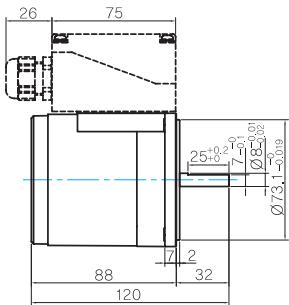


### MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	

### INTER-DECIMAL GEARBOX


- MODEL: 8XD10□□

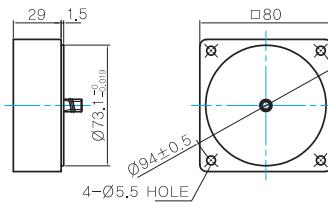


## GEARED MOTOR

### G TYPE GEARBOX

- MOTOR MODEL: 8RDG□-15G (NO FAN)

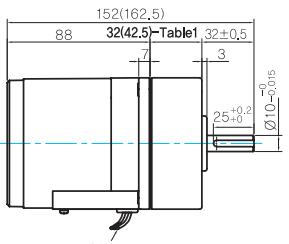


- GEARBOX MODEL: 8GBK□BMH

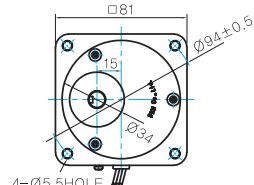

### GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	

### KEY SPEC

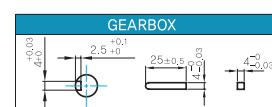


### 32(42.5)-Table1


SIZE(mm)	GEAR RATIO
32	8GBK3BMH ~ 8GBK18BMH
42.5	8GBK25BMH ~ 8GBK360BMH

### W TYPE GEARBOX

- MOTOR MODEL: 8RDG□-15W (NO FAN)

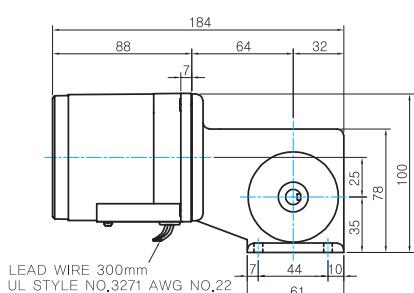

- GEARBOX MODEL: 8WD□BL/BR/BRL

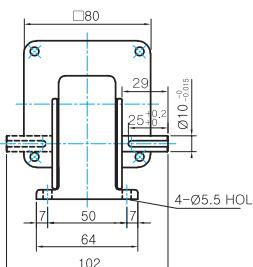

### WEIGHT

PART	WEIGHT(Kg)
	MOTOR
GEAR BOX	1.6
	8GBK3BMH ~ 8GBK18BMH 0.48
	8GBK25BMH ~ 8GBK30BMH 0.61
	8GBK36BMH ~ 8GBK180BMH 0.67
	8GBK200BMH ~ 8GBK360BMH 0.63
8WD□BL/BR/BRL	0.67
8XD10□□	0.44

## Motor Images



# B AC Motors

Reversible Motor 15W(□80mm)

## Connection Diagrams

Lead Wire Type	Terminal Box Type						
	<table border="1"> <thead> <tr> <th>Code</th><th>Contact Capacity</th></tr> </thead> <tbody> <tr> <td>SW</td><td>AC125V 5A min. AC250V 5A min. (Inductive load)</td></tr> <tr> <td>Ro, Co</td><td>Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)</td></tr> </tbody> </table> <p>* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)
Code	Contact Capacity						
SW	AC125V 5A min. AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)						

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

## Reversible Motor 25W(□ 80mm)

# 25W Reversible Motor 25W(□ 80mm)

### Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque		Rated Load			Capacitor μF / VAC
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm	
8RDGA-25□	8RDGA-25□-T	25	1Ø110	60	4	30min.	2.40	0.240	1550	0.73	1.62	0.162 10.0 / 250
8RDGD-25□	8RDGD-25□-T	25	1Ø220	60	4	30min.	2.40	0.240	1550	0.36	1.62	0.162 2.5 / 450
8RDGE-25□	8RDGE-25□-T	25	1Ø220	50	4	30min.	2.10	0.210	1250	0.28	2.00	0.200
			1Ø240				2.50	0.250		0.30	2.10	0.210
2) All models contain a built-in thermal protector. 3) Gear Type Shaft is for attaching Gearbox and D-Cut Type Shaft is for using motor only.												

1) Enter the phase & voltage code in the place \* and enter the model type of attaching Gearbox in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching Gearbox and D-Cut Type Shaft is for using motor only.

### Max. Permissible Torque at Output Shaft of Gearbox

#### □ 60Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	600	500	360	300	240	200	144	120	100	72	60	50	45	36	30	24	20	18	15	12	10
8RDG□-25G	8GBK□ BMH	kgfcm N.m	4.0 0.40	4.8 0.47	6.7 0.66	8.1 0.79	10.1 0.99	12.1 1.19	16.8 1.65	20.2 1.98	24.2 2.37	30.38 2.98	36.45 3.57	39.66 3.89	44.06 4.32	55.08 5.40	66.10 6.48	80.00 7.84	80.00 7.84	80.00 7.84	80.00 7.84	80.00 7.84	80.00 7.84
Motor Model	Gearbox Model	Gear Ratio	200	250	300	360	Motor Model		Gearbox Model		Gear Ratio	10	12	15	18	25	30	36	50	60			
8RDG□-25G	8GBK□ BMH	kgfcm N.m	80.0 7.84	80.0 7.84	80.0 7.84	80.0 7.84	8RDG□-25W	8WD□BL/□BR/□BRL	kgfcm N.m	13.3 1.30	15.6 1.52	18.7 1.83	21.6 2.11	28.4 2.78	32.1 3.14	37.3 3.66	48.6 4.76	53.5 5.24					

#### □ 50Hz

Motor Model	Gearbox Model	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	500	417	300	250	200	167	120	100	83	60	50	42	38	30	25	20	17	15	13	10	8
8RDG□-25G	8GBK□ BMH	kgfcm N.m	5.2 0.51	6.3 0.61	8.7 0.85	10.5 1.02	13.1 1.28	15.7 1.54	21.8 2.14	26.1 2.56	31.4 3.07	39.4 3.86	47.3 4.63	51.4 5.04	57.1 5.60	71.4 7.00	80.0 7.84	80.0 7.84	80.0 7.84	80.0 7.84	80.0 7.84	80.0 7.84	
Motor Model	Gearbox Model	Gear Ratio	200	250	300	360	Motor Model		Gearbox Model		Gear Ratio	10	12	15	18	25	30	36	50	60			
8RDG□-25G	8GBK□ BMH	kgfcm N.m	80.0 7.84	80.0 7.84	80.0 7.84	80.0 7.84	8RDG□-25W	8WD□BL/□BR/□BRL	kgfcm N.m	17.2 1.69	20.2 1.98	24.3 2.38	28.0 2.74	36.8 3.60	41.6 4.07	48.4 4.74	63.0 6.17	69.3 6.79					

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.

The actual speed is 2~20% less than the displayed value, depending on the size of the load.


# B AC Motors

## Reversible Motor 25W(□80mm)

### Dimensions

#### MOTOR ONLY

- MOTOR MODEL: 8RDD□-25(-T) (NO FAN)

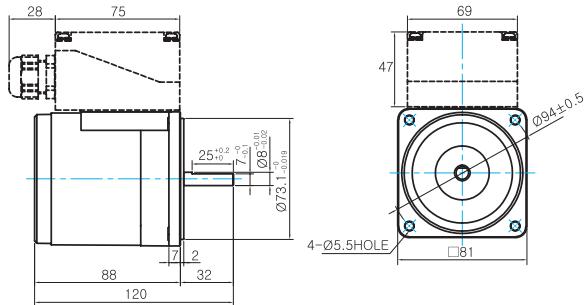


#### MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	

#### INTER-DECIMAL GEARBOX


- MODEL: 8XD10□□

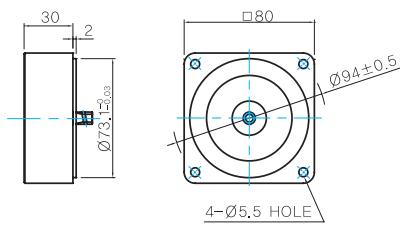


### GEARED MOTOR

#### G TYPE GEARBOX

- MOTOR MODEL: 8RDG□-25G (NO FAN)

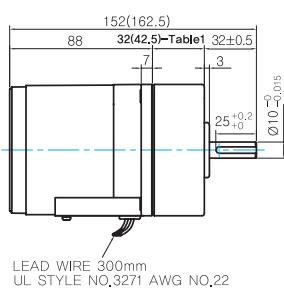

- GEARBOX MODEL: 8GBK□BMH




#### GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	

#### KEY SPEC

#### KEY SPEC




#### 30(40)-Table1


SIZE(mm)	GEAR RATIO
32	8GBK3BMH ~ 8GBK18BMH
42.5	8GBK25BMH ~ 8GBK360BMH

#### W TYPE GEARBOX


- MOTOR MODEL: 8RDG□-25W (NO FAN)

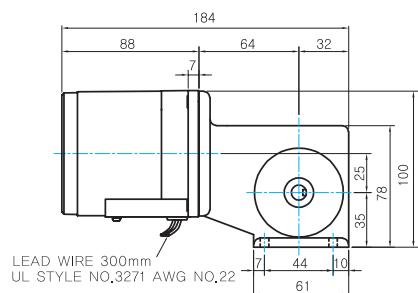

- GEARBOX MODEL: 8WD□BL/BR/BRL

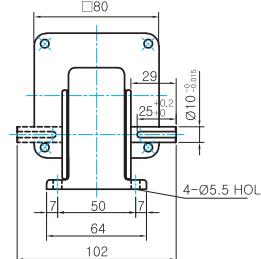


#### KEY SPEC




#### WEIGHT

PART	WEIGHT(Kg)	
	MOTOR	GEAR BOX
MOTOR	1.6	
8GBK3BMH ~ 8GBK18BMH	0.48	
8GBK25BMH ~ 8GBK30BMH	0.61	
8GBK36BMH ~ 8GBK180BMH	0.67	
8GBK200BMH ~ 8GBK360BMH	0.63	
8WD□BL/BR/BRL	0.67	
8XD10M□□	0.44	

## Motor Images

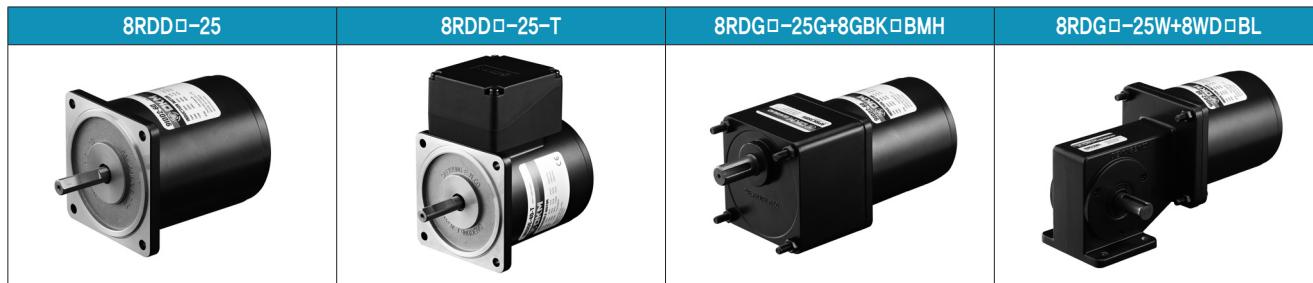

## Connection Diagrams

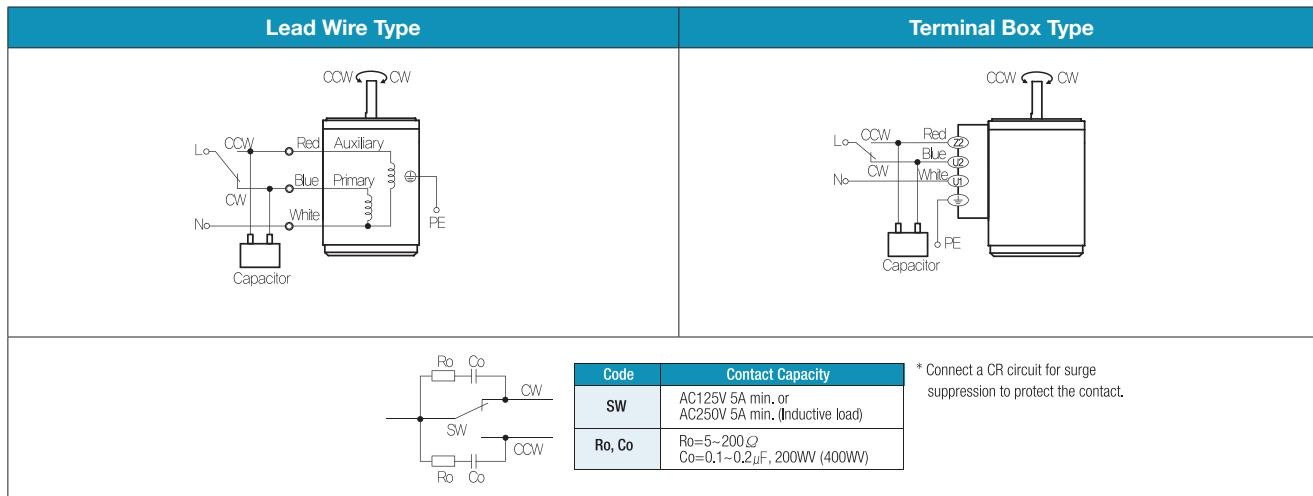

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

# B AC Motors

## Reversible Motor 40W(□90mm)

# 40W Reversible Motor 40W(□90mm)

### Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm N.m		Rated Load			Capacitor μF / VAC	
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm N.m		
9RDGA-40□	9RDGA-40□-T	40	1Ø110	60	4	30min.	4.20	0.420	1600	1.25	2.60	0.260	16.0 / 250
9RDGD-40□	9RDGD-40□-T	40	1Ø220	60	4	30min.	4.20	0.420	1600	0.61	2.60	0.260	4.0 / 450
9RDGE-40□	9RDGE-40□-T	40	1Ø220	50	4	30min.	3.00	0.300	1350	0.36	3.00	0.300	3.0 / 450
			1Ø240				3.60	0.360		0.39	3.40	0.340	

1) Enter the phase & voltage code in the place \* and enter the model type of attaching Gearbox in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching Gearbox and D-Cut & Key Type Shafts are for using motor only.

### Max. Permissible Torque at Output Shaft of Gearbox

#### 60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	180	144	120	100	72	60	50	45	36	30	24	20	18	15	12	10	9
9RDG□-40G	9GBK□ BMH	kgfcm N.m	4.3 0.42	6.5 0.63	7.8 0.76	10.8 1.06	12.9 1.27	16.2 1.59	19.4 1.90	21.6 2.11	27.0 2.64	32.4 3.17	35.1 3.44	48.8 4.78	58.5 5.73	63.6 6.24	70.7 6.93	88.4 8.66	100.0 9.80							

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9RDG□-40W	9WD□BL/□BR/□BRL	kgfcm N.m	21.3 2.09	25.0 2.45	30.0 2.94	34.6 3.39	45.5 4.46	51.5 5.05	59.9 5.87	78.0 7.64	85.8 8.41

#### 50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	150	120	100	83	60	50	42	38	30	25	20	17	15	13	10	8	7.5
9RDG□-40G	9GBK□ BMH	kgfcm N.m	5.6 0.55	8.5 0.83	10.2 1.00	14.1 1.38	16.9 1.66	21.2 2.07	25.4 2.49	28.2 2.77	35.3 3.46	42.3 4.15	45.9 4.50	63.8 6.25	76.5 7.50	83.2 8.16	92.5 9.06	100.0 9.80								

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9RDG□-40W	9WD□BL/□BR/□BRL	kgfcm N.m	27.9 2.73	32.6 3.20	39.3 3.85	45.3 4.44	59.5 5.83	67.3 6.60	78.3 7.68	102.0 10.00	112.2 11.00

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.


3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

## Dimensions

### MOTOR ONLY

- MOTOR MODEL: 9RDD□-40(-T) (NO FAN)

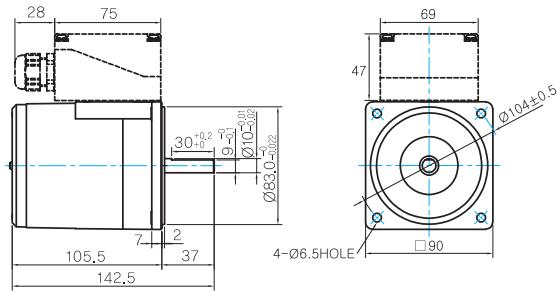


### MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9RDD□-40	
KEY TYPE	
9RDK□-40	

### INTER-DECIMAL GEARBOX


- MODEL: 9XD10□□

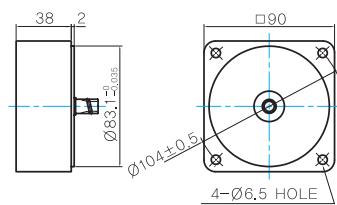


## GEARED MOTOR

### G TYPE GEARBOX

- MOTOR MODEL: 9RDG□-40G (NO FAN)

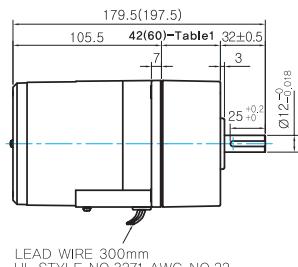


- GEARBOX MODEL: 9GBK□BMH



### GEARBOX OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	

### KEY SPEC

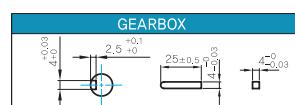


### 42(60)-Table1


SIZE(mm)	GEAR RATIO
42	9GBK2BMH ~ 9GBK18BMH
60	9GBK25BMH ~ 9GBK200BMH

### W TYPE GEARBOX


- MOTOR MODEL: 9RDG□-40W (NO FAN)

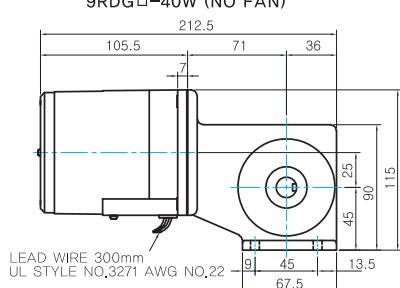

- GEARBOX MODEL: 9WD□BL/BR/BRL

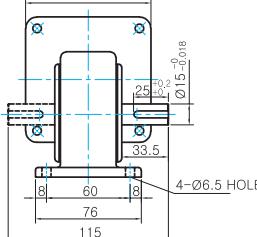

### KEY SPEC



### WEIGHT

PART	WEIGHT(Kg)	
	MOTOR	GEAR BOX
GEAR BOX	2.4	
	9GBK2BMH ~ 9GBK15BMH	0.67
	9GBK18BMH ~ 9GBK30BMH	0.96
	9GBK36BMH ~ 9GBK200BMH	1.07
	9WD□BL/BR/BRL	1.0
	9XD10□□	0.5


# B AC Motors

## Reversible Motor 40W(□90mm)

### Motor Images



### Connection Diagrams

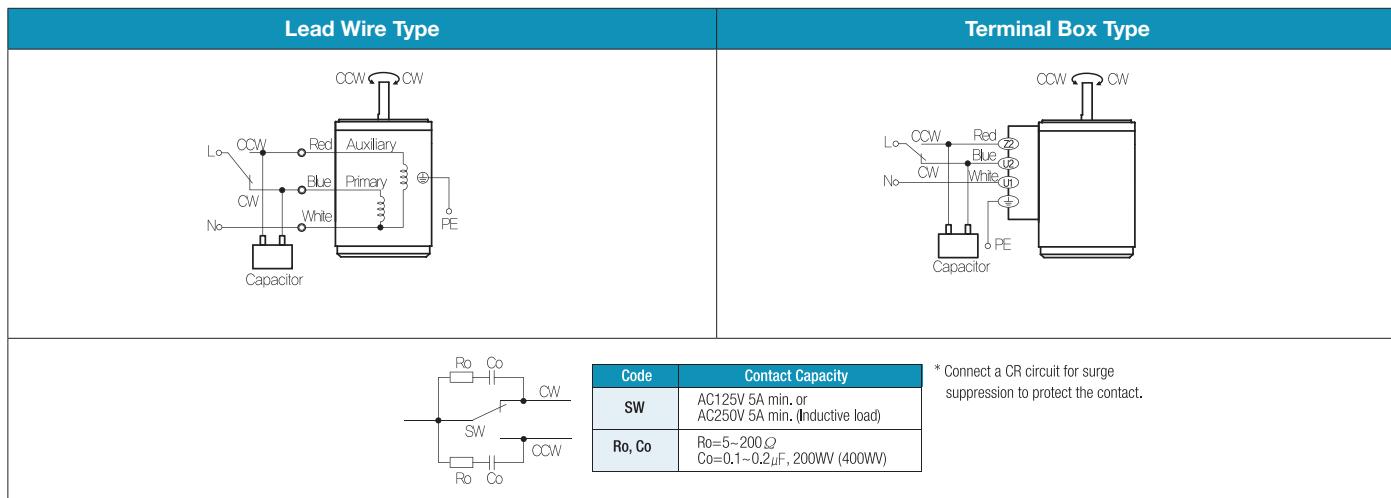

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

## Reversible Motor 60W(□90mm)

# 60W Reversible Motor 60W(□90mm)

### Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm N.m		Rated Load			Capacitor μF / VAC	
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm N.m		
9RDGA-60F□	9RDGA-60F□-T	60	1Ø110	60	4	30min.	5.20	0.520	1600	1.60	5.00	0.500	20.0 / 250
9RDGD-60F□	9RDGD-60F□-T	60	1Ø220	60	4	30min.	5.00	0.500	1600	0.75	4.60	0.460	5.0 / 450
9RDGE-60F□	9RDGE-60F□-T	60	1Ø220 1Ø240	50	4	30min.	5.40	0.540	1300	0.59	5.00	0.500	5.0 / 450
							6.60	0.660		0.64	5.60	0.560	

1) Enter the phase & voltage code in the place \* and enter the model type of attaching Gearbox in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching Gearbox and D-Cut & Key Type Shafts are for using motor only.

### Max. Permissible Torque at Output Shaft of Gearbox

#### 60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9RDG□-60FP	9PBK□BH 9PFK□BH	kgfcm N.m	7.6 0.75	11.5 1.12	13.7 1.35	19.1 1.87	22.9 2.24	28.6 2.81	34.4 3.37	43.1 4.23	51.8 5.07	62.1 6.09	62.6 6.13	78.2 7.66	93.8 9.20	112.6 11.04	125.1 12.26	156.4 15.33	200.0 19.60							
9RDG□-60FH	9HBK□BH 9HFK□BH	kgfcm N.m	— —	11.5 1.12	13.7 1.35	— —	22.9 2.24	— —	34.4 3.37	43.1 4.23	51.8 5.07	62.1 6.09	62.6 6.13	88.2 7.66	93.8 9.20	112.6 11.04	— —	156.4 15.33	187.7 18.39	210.5 20.62	252.5 24.75	300.0 29.40	300.0 29.40	300.0 29.40	300.0 29.40	
9RDG□-60FW	9WD□BL/ □BR/□BRL	kgfcm N.m	37.7 3.70	44.2 4.33	53.1 5.21	61.3 6.00	80.5 7.89	91.1 8.93	106.0 10.39	142.9 14.00	122.4 12.00															

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60	75	90	100	120	150	180	200	25	30	40	50	60	80
		r/min	180	150	120	100	72	60	50	36	30	24	20	15	12	10	8	7.5	30	22				
9RDG□-60FW	9WD□BL/ □BR/□BRL	kgfcm N.m	37.7 3.70	44.2 4.33	53.1 5.21	61.3 6.00	80.5 7.89	91.1 8.93	106.0 10.39	142.9 14.00	122.4 12.00	29.0 2.84	37.3 3.65	52.4 5.14	66.2 6.49	75.9 7.44	88.3 8.66	108.6 10.64	124.2 12.17	138.0 13.52	132.7 13.00			

#### 50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	120	100	83	75	60	50	42	38	30	25	20	17	15	13	10	8	7.5
9RDG□-60FP	9PBK□BH 9PFK□BH	kgfcm N.m	9.3 0.91	13.9 1.37	16.7 1.64	23.2 2.28	27.9 2.73	34.9 3.42	41.8 4.10	52.5 5.15	63.0 6.17	75.6 7.41	76.2 7.46	95.2 9.33	114.2 11.20	137.1 13.43	152.3 14.93	190.4 18.66	200.0 19.60							
9RDG□-60FH	9HBK□BH 9HFK□BH	kgfcm N.m	— 1.37	13.9 1.64	16.7 2.73	— 4.10	27.9 5.15	— 6.17	41.8 4.10	52.5 5.15	63.0 6.17	75.6 7.41	76.2 7.46	95.2 9.33	114.2 11.20	137.1 13.43	152.3 14.93	190.4 18.66	228.5 22.39	256.2 25.11	300.0 29.40	300.0 29.40	300.0 29.40	300.0 29.40		
9RDG□-60FW	9WD□BL/ □BR/□BRL	kgfcm N.m	45.9 4.50	53.8 5.27	64.7 6.34	74.6 7.31	98.0 9.60	110.9 10.87	129.0 12.64	142.9 14.00	122.4 12.00	35.3 3.46	45.4 4.45	63.8 6.26	80.6 7.90	92.4 9.06	107.5 10.54	132.2 12.95	151.2 14.82	163.3 16.00	132.7 13.00					

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.


4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

# B AC Motors

## Reversible Motor 60W(□90mm)

### Dimensions

#### MOTOR ONLY

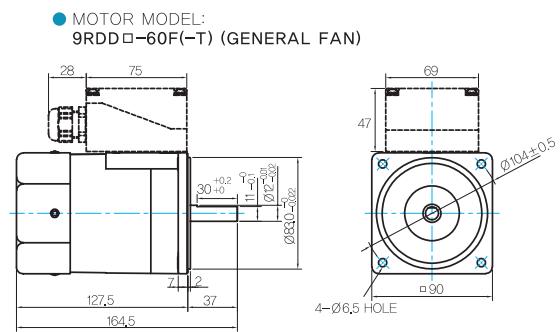


#### MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	37 30 <sup>+0.2</sup> <sub>-0.0</sub> Ø12 <sup>+0.05</sup> <sub>-0.05</sub>
KEY TYPE	37 25 <sup>+0.2</sup> <sub>-0.0</sub> Ø12 <sup>+0.05</sup> <sub>-0.05</sub>


MOTOR  
25<sup>+0.5</sup><sub>-0.3</sub>  
11<sup>+0.3</sup><sub>-0.3</sub>  
4<sup>+0.03</sup><sub>-0.03</sub>  
4<sup>+0.03</sup><sub>-0.03</sub>  
Ø104<sup>+0.5</sup><sub>-0.5</sub>

#### INTER-DECIMAL GEARBOX

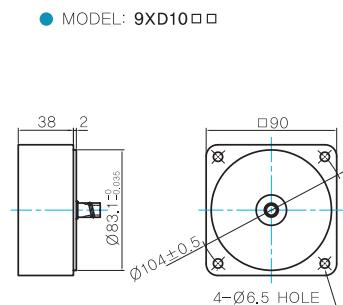


### GEARED MOTOR

#### P TYPE GEARBOX

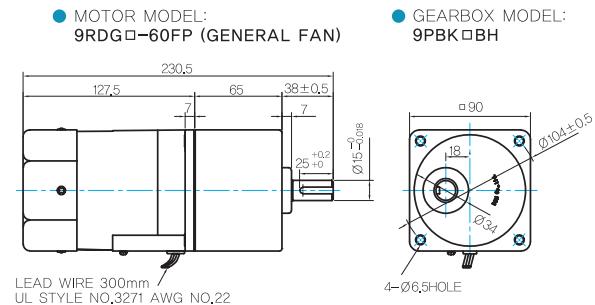

#### GEARBOX MODEL: 9PBK□BH

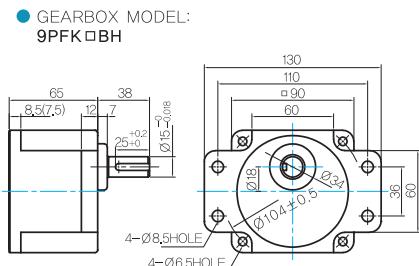

#### GEARBOX OUTPUT SHAFT


MODEL	SPEC
KEY TYPE	38 25 <sup>+0.2</sup> <sub>-0.0</sub> Ø15 <sup>+0.05</sup> <sub>-0.05</sub>

9PBK□BH  
9PFK□BH

#### KEY SPEC




#### H TYPE GEARBOX

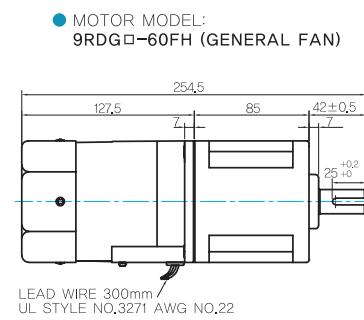

#### GEARBOX MODEL: 9HBK□BH

#### GEARBOX MODEL: 9HFK□BH

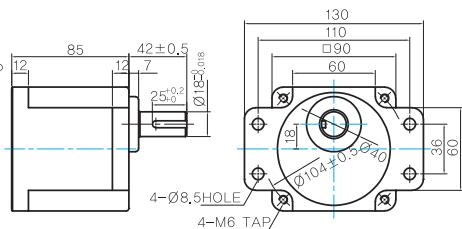


#### GEARBOX OUTPUT SHAFT


MODEL	SPEC
KEY TYPE	42 25 <sup>+0.2</sup> <sub>-0.0</sub> Ø18 <sup>+0.05</sup> <sub>-0.05</sub>

9HBK□BH  
9HFK□BH


#### KEY SPEC




#### W TYPE GEARBOX

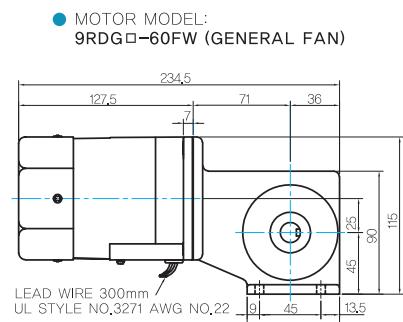


#### GEARBOX MODEL: 9WD□BL/BR/BRL

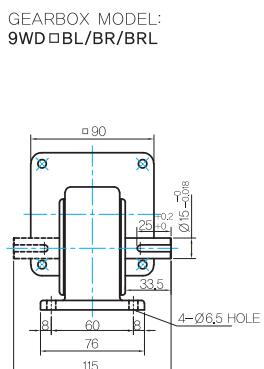


#### KEY SPEC

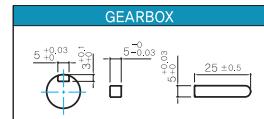


● MOTOR MODEL:  
9RDG□-90FWH (GENERAL FAN)

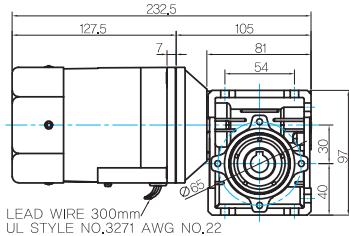

● GEARBOX MODEL:  
9WHD□-030

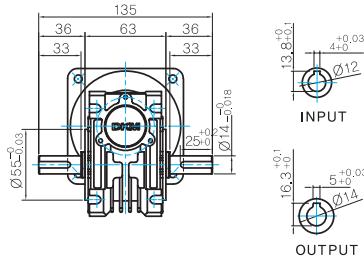


● SHAFT (Unidirectional, Bi-directional)

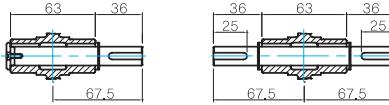

● WEIGHT


PART	WEIGHT(Kg)
MOTOR	3.0
9PB(F)K2BH ~ 9PB(F)K18BH	1.3
9PB(F)K20BH ~ 9PB(F)K200BH	1.4
9HB(F)K3BH ~ 9HB(F)K9BH	1.45
9HB(F)K12.5BH ~ 9HB(F)K18BH	1.5
9HB(F)K20BH ~ 9HB(F)K60BH	1.7
9HB(F)K75BH ~ 9HB(F)K200BH	1.8
9WD□BL/BR/BRL	1.0
9WHD□-030	1.13
9XD10□□	0.5

● FLANGE

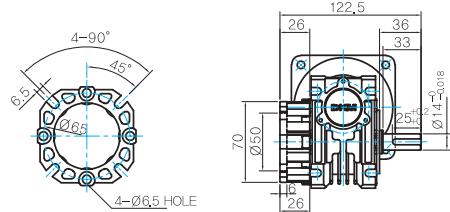

\* The output flange and shafts are sold separately.

● KEY SPEC

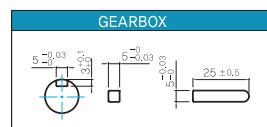




● Motor Images



# B AC Motors

Reversible Motor 60W(□90mm)

## Connection Diagrams

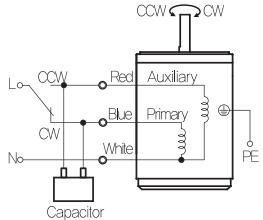Lead Wire Type	Terminal Box Type						
							
 <table border="1"> <thead> <tr> <th>Code</th><th>Contact Capacity</th></tr> </thead> <tbody> <tr> <td>SW</td><td>AC125V 5A min. AC250V 5A min. (Inductive load)</td></tr> <tr> <td>Ro, Co</td><td>Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)</td></tr> </tbody> </table>	Code	Contact Capacity	SW	AC125V 5A min. AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)	<p>* Connect a CR circuit for surge suppression to protect the contact.</p>
Code	Contact Capacity						
SW	AC125V 5A min. AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)						

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

## Reversible Motor 90W(□90mm)

# 90W Reversible Motor 90W(□90mm)

### Motor Specification

Model			Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm N.m	Rated Load			Capacitor μF / VAC	
Lead Wire Type	Terminal Box Type	Speed r/min	Current A	Torque kgfcm N.m									
9RDGA-90F□	9RDGA-90F□-T	90	1Ø110	60	4	30min.	6.60	0.660	1600	2.00	6.40	0.640	25.0 / 250
9RDGD-90F□	9RDGD-90F□-T	90	1Ø220	60	4	30min.	6.00	0.600	1600	0.97	6.60	0.660	6.0 / 450
9RDGE-90F□	9RDGE-90F□-T	90	1Ø220 1Ø240	50	4	30min.	6.40	0.640	1250	0.90	7.80	0.780	6.0 / 450
								7.80	0.780		1.00	8.90	0.890

1) Enter the phase & voltage code in the place \* and enter the model type of attaching Gearbox in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching Gearbox and D-Cut & Key Type Shafts are for using motor only.

### Max. Permissible Torque at Output Shaft of Gearbox

#### 60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9RDG□-90FP	9PBK□BH 9PFK□BH	kgfcm N.m	11.0 1.07	16.4 1.61	19.7 1.93	27.4 2.68	32.9 3.22	41.1 4.03	49.3 4.83	61.9 6.06	74.3 7.28	89.1 8.73	89.76 8.80	112.2 11.00	134.6 13.19	161.1 15.83	179.5 17.59	200.0 19.60								
9RDG□-90FH	9HBK□BH 9HFK□BH	kgfcm N.m	— 1.61	16.4 1.93	19.7 —	— 3.22	32.9 4.83	— 6.06	49.3 7.28	61.9 8.73	74.3 8.80	89.1 8.80	89.8 11.00	112.2 13.19	134.6 15.83	161.6 18.71	— 224.4	269.3 300.0	300.0 300.0							

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60	75	90	100	120	150	180	200	25	30	40	50	60	80	
		r/min	180	150	120	100	72	60	50	36	30	24	20	15	20	25	30	40	50	60	75	90	100	120	150
9RDG□-90FW	9WD□BL/ □BR/□BRL	kgfcm N.m	54.1 5.30	63.4 6.21	76.2 7.47	87.9 8.62	115.5 11.32	130.7 12.81	153.1 15.00	142.9 14.00	122.4 12.00	41.6 4.07	53.5 5.24	75.2 7.37	95.0 9.31	108.9 10.67	126.7 12.42	155.8 15.26	173.5 17.00	163.3 16.00	132.7 13.00	132.7 13.00	132.7 13.00	132.7 13.00	132.7 13.00

#### 50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	120	100	83	75	60	50	42	38	30	25	20	17	15	13	10	8	7.5
9RDG□-90FW	9PBK□BH 9PFK□BH	kgfcm N.m	12.9 1.27	19.4 1.90	23.3 2.28	32.4 3.17	38.8 3.81	48.6 4.76	58.3 5.71	73.1 7.17	87.8 8.60	105.3 10.32	106.1 10.40	132.6 12.99	159.1 15.59	190.9 18.71	200.0 19.60									
9RDG□-90FH	9HBK□BH 9HFK□BH	kgfcm N.m	— 1.90	19.4 2.28	23.3 —	— 3.81	38.8 5.71	— 7.17	58.3 8.60	73.1 10.32	87.8 10.40	105.3 12.99	106.1 12.99	132.6 15.59	159.1 18.71	190.9 25.99	200.0 29.40									

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60	75	90	100	120	150	180	200	25	30	40	50	60	80		
		r/min	150	125	100	83	60	50	42	30	25	20	17	15	13	10	8	7.5	200	150	100	75	60	50	38	30
9RDG□-90FW	9WD□BL/ □BR/□BRL	kgfcm N.m	64.0 6.27	74.9 7.34	90.1 8.83	103.9 10.18	136.5 13.38	154.4 15.14	153.1 15.00	142.9 14.00	122.4 12.00	49.1 4.82	63.2 6.19	88.9 8.71	112.3 11.01	128.7 12.61	149.8 14.68	183.7 18.00	173.5 17.00	163.3 16.00	132.7 13.00	132.7 13.00	132.7 13.00	132.7 13.00	132.7 13.00	

- Enter the phase & voltage code in the box (□) within the motor model name.
- Enter the gear ratio in the box (□) within the Gearbox model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.
- The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.

The actual speed is 2~20% less than the displayed value, depending on the size of the load.


# B AC Motors

## Reversible Motor 90W(□90mm)

### Dimensions

#### MOTOR ONLY


- MOTOR MODEL:  
9RDD □-90F(-T) (GENERAL FAN)

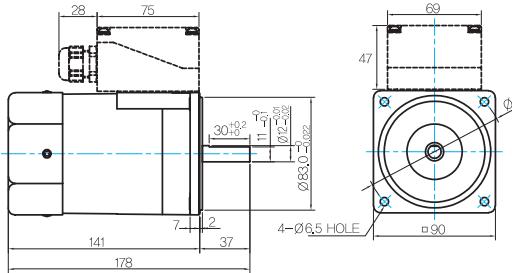

#### MOTOR OUTPUT SHAFT


MODEL	SPEC
D-CUT TYPE 9RDD □-90F	37 30 <sup>+0.2</sup> / <sub>-0.1</sub> 25 <sup>+0.2</sup> / <sub>-0.1</sub> Ø104 <sup>+0.5</sup>
KEY TYPE 9RDK □-90F	37 25 <sup>+0.2</sup> / <sub>-0.1</sub> Ø104 <sup>+0.5</sup>

#### KEY SPEC



#### INTER-DECIMAL GEARBOX


- MODEL: 9XD10 □□

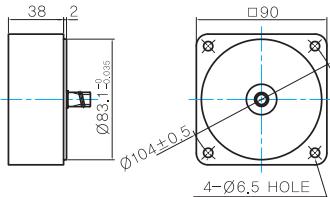


### GEARED MOTOR

#### P TYPE GEARBOX


- MOTOR MODEL:  
9RDG □-90FP (GENERAL FAN)

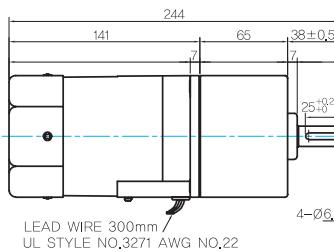

- GEARBOX MODEL:  
9PBK □BH




- GEARBOX MODEL:  
9PFK □BHI

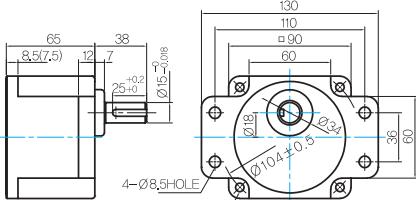

#### GEARBOX OUTPUT SHAFT


MODEL	SPEC
KEY TYPE 9PBK □BH	38 25 <sup>+0.2</sup> / <sub>-0.1</sub> Ø104 <sup>+0.5</sup>
9PFK □BHI	38 25 <sup>+0.2</sup> / <sub>-0.1</sub> Ø104 <sup>+0.5</sup>

#### KEY SPEC




#### H TYPE GEARBOX


- MOTOR MODEL:  
9RDG □-90FH (GENERAL FAN)

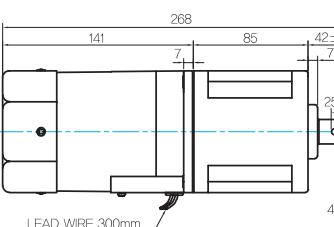

- GEARBOX MODEL:  
9HBK □BH



- GEARBOX MODEL:  
9HFK □BHI

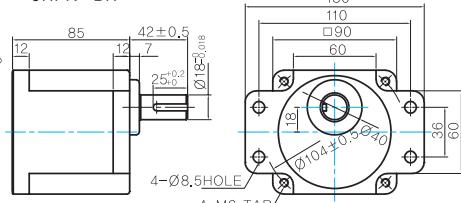

#### GEARBOX OUTPUT SHAFT


MODEL	SPEC
KEY TYPE 9HBK □BH	42 25 <sup>+0.2</sup> / <sub>-0.1</sub> Ø104 <sup>+0.5</sup>
9HFK □BHI	42 25 <sup>+0.2</sup> / <sub>-0.1</sub> Ø104 <sup>+0.5</sup>

#### KEY SPEC




#### W TYPE GEARBOX


- MOTOR MODEL:  
9RDG □-90FW (GENERAL FAN)

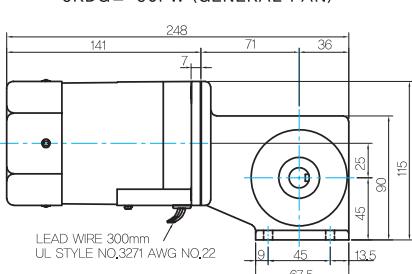


- GEARBOX MODEL:  
9WD □BL/BR/BRL

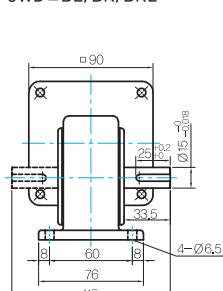


#### KEY SPEC

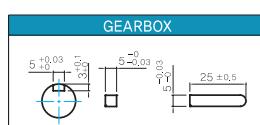


- MOTOR MODEL:  
9RDG□-90FWH (GENERAL FAN)

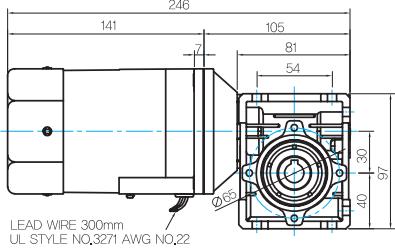

- GEARBOX MODEL:  
9WHD□-030

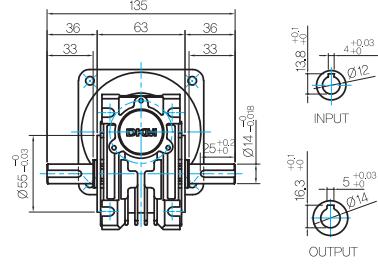

- SHAFT(Unidirectional, Bi-directional)

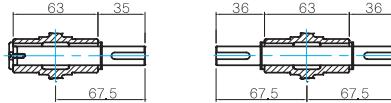

## WEIGHT

PART		WEIGHT(Kg)
MOTOR		3,0
GEAR BOX	9PB(F)K2BH ~ 9PB(F)K18BH	1.3
	9PB(F)K20BH ~ 9PB(F)K200BH	1.4
	9HB(F)K38H ~ 9HB(F)K9BH	1.45
	9HB(F)K12,5BH ~ 9HB(F)K18BH	1.5
	9HB(F)K20BH ~ 9HB(F)K60BH	1.7
	9HB(F)K75BH ~ 9HB(F)K200BH	1.8
	9WD□BL/BR/BRL	1.0
	9WHD□-030	1.13
	9XD10□□	0,5

\* The output flange and shafts are sold separately.

 Motor Images

# B AC Motors

Reversible Motor 90W(□ 90mm)

## Connection Diagrams

Lead Wire Type	Terminal Box Type						
	<table border="1"> <thead> <tr> <th>Code</th><th>Contact Capacity</th></tr> </thead> <tbody> <tr> <td>SW</td><td>AC125V 5A min. AC250V 5A min. (Inductive load)</td></tr> <tr> <td>Ro, Co</td><td>Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)</td></tr> </tbody> </table> <p>* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)
Code	Contact Capacity						
SW	AC125V 5A min. AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)						

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.

## Reversible Motor 120W(□90mm)

# 120W

Reversible  
Motor  
120W(□90mm)

### Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm N.m	Rated Load			Capacitor μF / VAC
Lead Wire Type	Terminal Box Type							Speed r/min	Current A	Torque kgfcm N.m	
9RDGA-120F□	9RDGA-120F□-T	120	1Ø110	60	4	30min.	7.60 0.760	1550	2.50	7.60 0.760	30.0 / 250
9RDGD-120F□	9RDGD-120F□-T	120	1Ø220	60	4	30min.	6.60 0.660	1600	1.10	7.40 0.740	6.5 / 450
9RDGE-120F□	9RDGE-120F□-T	120	1Ø220	50	4	30min.	6.40 0.640	1250	1.00	9.40 0.940	6.5 / 450
			1Ø240				7.80 0.780		1.10	10.20 1.020	

1) Enter the phase & voltage code in the place \* and enter the model type of attaching Gearbox in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching Gearbox and D-Cut & Key Type Shafts are for using motor only.

### Max. Permissible Torque at Output Shaft of Gearbox

#### 60Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	900	600	500	360	300	240	200	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9RDG□-120FP	9PBK□BH	kgfcm	12.3	18.4	22.1	30.7	36.9	46.1	55.3	69.4	83.3	99.9	100.6	125.8	151.0	181.2	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	
	9PFK□BH	N.m	1.20	1.81	2.17	3.01	3.61	4.51	5.42	6.80	8.16	9.79	9.86	12.33	14.79	17.75	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	
9RDG□-120FH	9HBK□BH	kgfcm	—	18.4	22.1	—	36.9	—	55.3	69.4	83.3	99.9	100.6	125.8	151.0	181.2	—	251.6	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	—	1.81	2.17	—	3.61	—	5.42	6.80	8.16	9.79	9.86	12.33	14.79	17.75	—	24.66	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9RDG□-120FW	9WWD□BL/ □BR/□BRL	kgfcm	60.7	71.0	85.5	98.6	129.5	146.5	153.1	142.9	122.4
		N.m	5.95	6.96	8.38	9.66	12.69	14.36	15.00	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	7.5	10	15	20	25	30	40	50	60	80
		r/min	240	180	120	90	72	60	45	36	30	22
9RDG□-120FWH	9WHD□-030	kgfcm	46.6	59.9	84.4	106.6	122.1	142.1	174.6	173.5	163.3	132.7
		N.m	4.57	5.87	8.27	10.44	11.97	13.92	17.11	17.00	16.00	13.00

#### 50Hz

Motor Model	Gearbox Model	Gear Ratio	2	3	3.6	5	6	7.5	9	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
		r/min	750	500	417	300	250	200	167	120	100	83	75	60	50	42	38	30	25	20	17	15	13	10	8	7.5
9RDG□-120FP	9PBK□BH	kgfcm	15.6	23.4	28.1	39.0	46.8	58.5	70.2	88.1	105.8	126.9	127.8	159.8	191.8	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	
	9PFK□BH	N.m	1.53	2.29	2.75	3.82	4.59	5.73	6.88	8.64	10.36	12.44	12.53	15.66	18.79	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	
9RDG□-120FH	9HBK□BH	kgfcm	—	23.4	28.1	—	46.8	—	70.2	88.1	105.8	126.9	127.8	159.8	191.8	230.1	—	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0	300.0
	9HFK□BH	N.m	—	2.29	2.75	—	4.59	—	6.88	8.64	10.36	12.44	12.53	15.66	18.79	22.55	—	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40

Motor Model	Gearbox Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	150	125	100	83	60	50	42	30	25
9RDG□-90FW	9WWD□BL/ □BR/□BRL	kgfcm	77.1	90.2	108.6	125.2	142.9	163.3	153.1	142.9	122.4
		N.m	7.55	8.84	10.64	12.27	14.00	16.00	15.00	14.00	12.00

Motor Model	Gearbox Model	Gear Ratio	7.5	10	15	20	25	30	40	50	60	80
		r/min	200	150	100	75	60	50	38	30	25	18
9RDG□-120FWH	9WHD□-030	kgfcm	59.2	76.1	107.2	135.4	155.1	180.5	183.7	173.5	163.3	132.7
		N.m	5.80	7.46	10.50	13.27	15.20	17.69	18.00	17.00	16.00	13.00

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.


# B AC Motors

## Reversible Motor 120W(□90mm)

### Dimensions

#### MOTOR ONLY

● MOTOR MODEL:  
9RDD□-120F(-T) (GENERAL FAN)

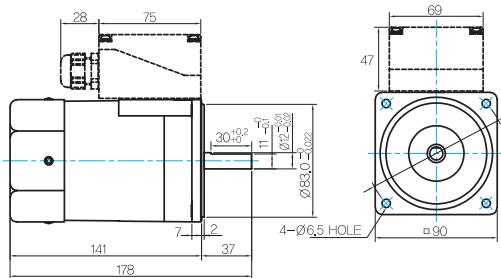


● MOTOR OUTPUT SHAFT ● KEY SPEC

MODEL	SPEC
D-CUT TYPE 9RDD□-120F	37 30.0±0.2 11 12 37 25.0±0.5 47.0±0.3
KEY TYPE 9RDK□-120F	37 30.0±0.2 11 12 37 25.0±0.5 47.0±0.3

MOTOR
4.0±0.3 2.5±0.1 25.0±0.5 47.0±0.3

#### INTER-DECIMAL GEARBOX


● MODEL: 9XD10□□

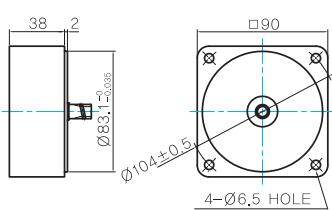


### GEARED MOTOR

#### P TYPE GEARBOX


● MOTOR MODEL:  
9RDG□-120FP (GENERAL FAN)

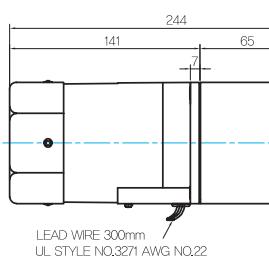

● GEARBOX MODEL:  
9PBK□BH




● GEARBOX MODEL:  
9PFK□BHI

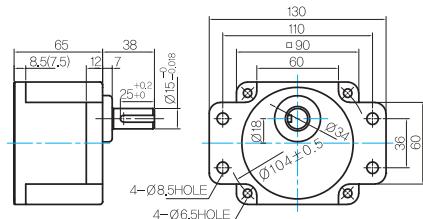

● GEARBOX OUTPUT SHAFT


MODEL	SPEC
KEY TYPE 9PBK□BH	38 25.0±0.2 Ø104±0.5
9PFK□BHI	38 25.0±0.2 Ø104±0.5

● KEY SPEC




#### H TYPE GEARBOX

● MOTOR MODEL:  
9RDG□-120FH (GENERAL FAN)

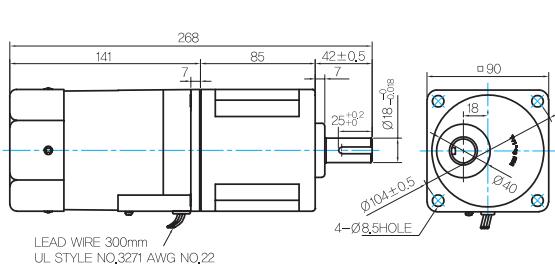

● GEARBOX MODEL:  
9HBK□BH

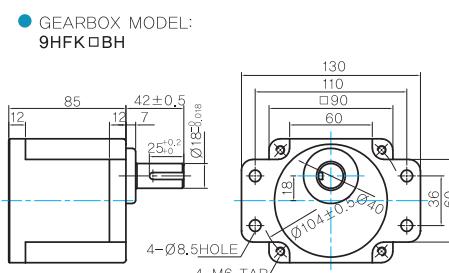

● GEARBOX MODEL:  
9HFK□BH

● GEARBOX OUTPUT SHAFT


MODEL	SPEC
KEY TYPE 9HBK□BH	42 25.0±0.2 Ø104±0.5
9HFK□BH	42 25.0±0.2 Ø104±0.5

● KEY SPEC




#### W TYPE GEARBOX


● MOTOR MODEL:  
9RDG□-120FW (GENERAL FAN)


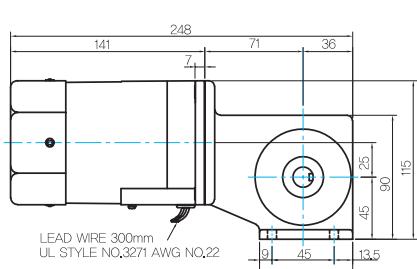


● GEARBOX MODEL:  
9WD□BL/BR/BRL

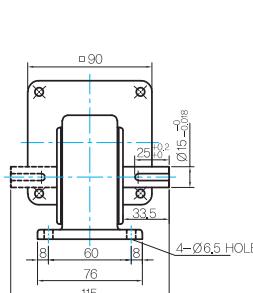


● KEY SPEC

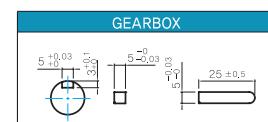

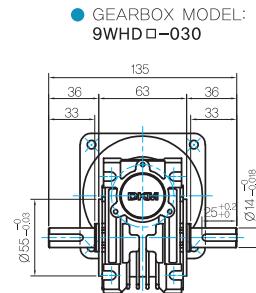
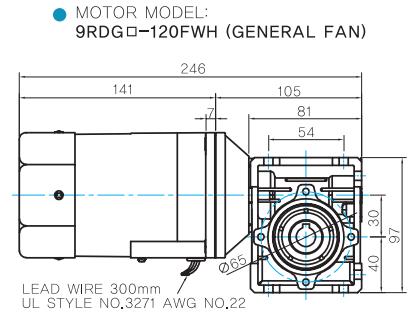


● SHAFT(Unidirectional, Bi-directional)

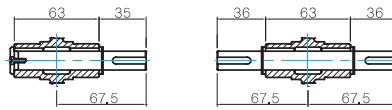

● WEIGHT

PART	WEIGHT(Kg)
MOTOR	3,0
9PB(F)K2BH ~ 9PB(F)K18BH	1.3
9PB(F)K20BH ~ 9PB(F)K200BH	1.4
9HB(F)K3BH ~ 9HB(F)K9BH	1.45
9HB(F)K12,5BH ~ 9HB(F)K18BH	1.5
9HB(F)K20BH ~ 9HB(F)K60BH	1.7
9HB(F)K75BH ~ 9HB(F)K200BH	1.8
9WD□BL/BR/BRL	1.0
9WHD□-030	1.13
9XD10□□	0.5



\* The output flange and shafts are sold separately.

● Motor Images

